

Evaluation and Modeling the Performance of Rice Husk Gasifier Cook Stove for Household Energy Use

Mersha A. Fetene, Dessye B. Tikuneh

Summary — The study evaluates the Belonio-type gasifier stoves with rice husk as sustainable energy sources and waste management options for Ethiopian households. It compares the performance of insulated and non-insulated types to determine reactor design parameters. It predicts a mathematical model for the optimal performance of the gasifier stoves, where the insulated stove showed a lower start-up time. Still, there was no significant difference at a 5% probability level. The temperature change was also insignificant, as heat transfer and temperature change started when the husk was ignited. At room temperature, the maximum and minimum flame temperatures were 1,190.30 °C and 27.33 °C respectively, whereas the average temperature was 758.916 °C for the non-insulated gasifier stove. The insulated gasifier stove also observed maximum and average temperatures of 518.30 °C and 289.014 °C, respectively, at the same room temperature. The fuel consumption rate has a significant effect on the type of gasifier stove, with the maximum rates being 3.820 and 2.099 kg/hr for non-insulated and insulated types of gasifier stoves, respectively. The average specific gasification rates for insulated and non-insulated types of stoves are 106.45 and 120.63 kg/m²h, respectively. The fuel or rice husk holding capacity of each type of stove is significant at a 5% level, with the amount of rice husk and biochar produced being 1.18 kg and 0.27 kg for insulated stoves, and 2.511 kg and 0.688 kg for non-insulated stoves, respectively. Multiple regression analysis was used to model the relationship between time elapsed and temperature and heat energy. The cubic polynomial model was found to be the best predictive model for all variables that can be used to predict the optimal combination of variables. Hence, it can be concluded that the stove is very acceptable with a high prospect for adoption for household energy use.

Keywords — Energy, Insulated, Non-Insulated, Heat, Temperature, Time, Boiling, Relation

I. INTRODUCTION

Rice milling generates a byproduct known as husk, with 78% of the weight being head rice, broken rice, and bran during the milling process of paddy. According to the Central Statistics Agency (CSA), the Ethiopian rice production has increased from 170,630.101 tons to 268, 223.514 tons of paddy in 2019/2020 to 2020/2021 cropping season [1]. Hence, during milling an average of 22% of the paddy is received as husk [2]. Rice mills in Ethi-

opia, are situated in rice-producing areas in Fogera, Gurafarda, and Gambella [3]. These mills produce rice from dry paddy through various processes including cleaning, parboiling, drying, milling, polishing, and packaging. Recently, rice husk biomass waste has been common in those rice-producing regions considered as waste material and has generally been disposed of by dumping or burning, although some have been used as a low-grade fuel. This has led to environmental problems such as pollution resulting in a refuse heap on streets, drainage systems, and waterways, which has resulted in flooding on rainy days due to the blockage of waterways [4]. On the other hand, Ethiopia has one of Africa's fastest-growing economies but has one of the world's poorest access to modern renewable energy supplies. Biomass accounts for approximately 87% of the total energy supply in rural areas for lighting and cooking [5].

However, this waste can be converted into fuel for domestic cooking, benefiting many households and achieving more forest savings for the country [6]. Rice husk can be a solution for renewable energy promotion and an alternative for the reduction of greenhouse gas emissions by being an alternative to fast-declining wood fuels. Energy remains essential for development, but the exploitation of energy sources needs to be carried out with sustainability in mind. Rice husk has a higher ash content (20-22.4%), 1.0% crude protein, 0.3% crude fat, and 30% carbohydrate with exceptional biomass with good flow ability, availability with 10-12% moisture, and fewer alkaline minerals [7]. It can be used for household fuel, with 25% of the weight converted into ash during the firing process. Using rice husk as a useful household energy source has the advantages of cleanliness, ease of handling, and igniting, producing a small volume of smoke. Its ash content is rich in potash and phosphate, which can be used as fertilizer on unfertile soil. Hence, rice husk dumps can be properly recycled into useful products, more goods will be made available to society, and environmental pollution and other disease attacks will be greatly reduced [7]. Rice husk ash can be used as organic fertilizer, pest or insect repellent, or for eco-friendly construction. Rice husk accumulation is challenging to eradicate; instead, it is a situation that must be continually managed and controlled by utilization and specifically by household fuel and energy branding remains the sustainable option for dealing with husk accumulation, as this takes up a long time [8].

Research trials and emerging evidence suggest that sustainable approaches help increase yields while making production systems more resilient and economically accessible [9]. The developed Belonio-type rice husk stoves are available in countries where rice growing is a major economic activity, such as India, Indonesia, and the Philippines [8]. This simple stove requires no installation and is ready for use by end-users with basic instructions. Rice husk gasifier stoves reduce the accumulation of rice husks in riverbanks

(Corresponding author: Dessye Belay Tikuneh)

Mersha A. Fetene and Dessye B. Tikuneh are with the Ethiopian Institute of Agricultural Research, Agricultural Engineering Research, Bahir Dar, Ethiopia (e-mail: dessyebelay20@gmail.com)

and along roadsides, utilization to reduce the wild dumping of rice husks in Ethiopia's Fogera plain, going a long way in reducing the cutting of trees for fuel wood, which in turn will cause desertification. This rice husk stove was introduced recently and refabricated in Ethiopia and was evaluated and predicted model as a major research activity that needs further adoption. Hence, this research report was initiated with the following objectives.

- To evaluate the Belonio-type gasifier stoves with rice husk as a sustainable energy source and waste management options for Ethiopian household energy use
- To investigate and compare the performance of the Belonio-type insulated and non-insulated types of gasifier stoves for the determination of appropriate design parameters of the reactor
- To predict an appropriate mathematical model estimating the optimum performance of the Belonio-type gasifier stoves

II. MATERIALS AND METHODS

STUDY AREA

The research was conducted in Fogera National Rice Research and Training Center (FNRRTC), Wereta, Ethiopia, which is one of the federal research centers of the Ethiopian Institute of Agricultural Research (EIAR) found in Fogera Wereda, south Gondar zone of Amhara Regional State, Ethiopia. It is located at 11° 58' N latitude, 37° 41' E longitude, and at an elevation of 1810 m above sea level. Based on ten years' average meteorological data, the annual rainfall, and mean annual minimum, maximum, and average air temperatures are 1300mm, 11.5°C, 27.9°C, and 18.3°C, respectively (Abebe et al., 2019). FNRRTC is located 625 km from Addis Ababa and 55 km from the regional capital of Bahir Dar, Ethiopia.

DESCRIPTION OF THE RICE HUSK GASIFIER STOVE

The rice husk gasifier stove is a recently developed device for domestic cooking that utilizes rice husks as fuel. Primarily, the stove was developed by [8] that used to burn rice husk using a limited amount of air for combustion to produce a luminous blue flame, which is almost similar to that of the liquid petroleum gas (LPG) stove. Then the model of the gasifier stove was redesigned and re-manufactured in Ethiopia for utilization of rice husk for household energy and then evaluated and modeled its performance in the Ethiopian condition. According to [8], the details of the gasifier stove components are explained below:

- **Gasifier stove reactor:** It is the part of the gasifier stove, where rice husks are put and burned while breathing in very little air. This cylindrical reactor can range in diameter from 0.10 to 0.30 meters, depending on how much electricity the stove requires. Depending on the needed working period, the cylinder's height ranges from 0.4 to 1.0 m. The cylinder is constructed from gauge no. 18 regular galvanized iron on the outside and gauge no. 20 stainless steel on the interior. The burned rice husks or any other materials are placed in this 2-cm cylinder area, which acts as insulation to stop heat loss in the gasifier. Rice husks are held in place during gasification by a stainless steel fuel grate located at the reactor's bottom end. This grate is angled so that, following each operation, it may be readily released. To keep the grate in the right position while in use, a lock or spring is used. To prevent hands from unintentionally contacting the hot reactor while it is operating, an alumi-

num screen is held in place by circular rings around the exterior of the reactor (Fig. 1).

- **The char chamber:** It stores the char that is left over from each operation. Its placement underneath the reactor makes it convenient to collect any char that may fall from the reactor. The door to this chamber can be opened for convenient charcoal disposal, but it must always be kept closed while running the gasifier. To minimize excessive airflow loss in the system during fuel gasification, the char chamber is firmly fitted on all sides to keep air released by the fan from exiting the chamber. To hold the entire stove, the chamber has four (4) support legs with rubber coverings underneath (Fig. 1).
- **Air blower:** during gasification, the fan assembly supplies the air required by the fuel. To force air into the reactor's rice husk column directly, it is often connected to the char chamber at either the chamber's entrance or its interior. The standard model's fan is an axial-type fan with a 3-inch diameter, which is frequently found in computer systems. It uses a 220-volt AC line with a rated power input of 16 watts. During operation, the fan's speed is managed by a manually operated rotary switch, which also regulates the gas supply to the burner. The burner (Fig. 1) transforms the gas exiting the reactor into a blue flame.
- **Burner:** It is made up of a series of 3/8-inch-diameter holes that allow flammable gas to flow through. The air required for gas combustion is supplied by the secondary holes around the burner's perimeter. A pot support sits atop the burner, keeping the pot steady as it cooks. The burner is fixed in place during operation and is detachable for simple fuel loading into the reactor (Fig. 1).

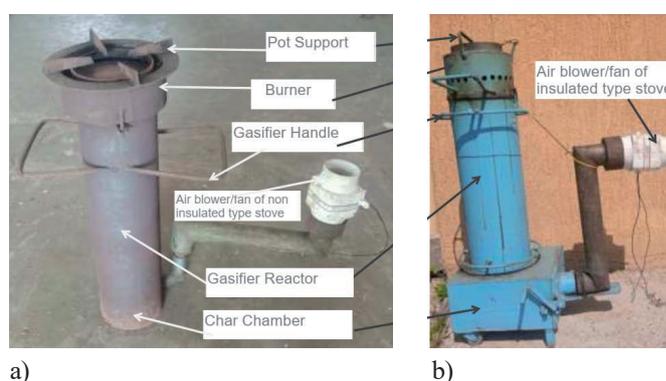


Fig. 1. Parts of the rice husk gasifier stove (a) the non-insulated type and (b) insulated type gasifier stoves

MATERIALS USED

The following are the materials and instruments used to test the performance of the stove:

1. **Fresh, dried rice husk** – This will be used as fuel in testing the performance of the stove. It was freshly obtained from the rice husk and dried to be 9.97% moisture content.
2. **Volumetric flasks and beaker** - This glassware was used to measure the volume of water before and after the boiling test. The change in the volume of water after the test indicates the power output of the stove per load.
3. **Stop Watch** – This was used to record the time of each of the different activities both cooking and boiling) during the tests.

4. **Thermometer** - This equipment is used in the measuring of the gas temperature leaving the combustion chamber was a universal thermometer, 0-250 °C (model: Bengt Ek Design/ 209007).
5. **Sensitive Weighing Balance** - This device with the model WT6002N was used to measure the weight of rice husk fuel as well as the weight of food to be cooked and the weight of water to be boiled.
6. **The data logger** – was used to measure the temperature produced by burning rice husks in the reactor of the stove as well as related generated and losses of heat. The data loggers with the Squirrel 2020 with SQ2020/2F8 model were used in this research with high-performance universal data loggers with fast, and PC-linked data acquisition systems in this research. It used this device for that maximum temperature with twin processors, multiple 24-bit analog-to-digital converters, up to 16 universal channels, and a choice of communications methods to ensure that the Squirrel 2020 series provides state-of-the-art data logging and communication capability for sophisticated applications needs.

THE PROCEDURE OF THE EXPERIMENT

In this study, the rice husks were collected from the FNRRTC rice-processing workshop. The guidelines for the performance evaluation and operation of the stove used were based on standard procedures recommended by [8]. The raw material, the rice husk was collected and cleaned to avoid foreign matters such as stone, soil, and other foreign matters. The collected raw material was then sun-dried to remove excess moisture and make it easy to handle, transport, and store. After maintaining husk moisture at 9.97%, it was evaluated as an energy source for cooking using a gasifier stove. The rice husk gasifier stove was a recently developed device to utilize rice husk as a fuel that was used for evaluating rice husk for household fuel with minor modifications [8]. The char is a carbonized raw material that was taken out of the reactor and cooled. Some pictures taken during the experiment are illustrated in Fig. 2 and 3 below. The burner, grate, and ash chamber door are set in their proper position during the performance evaluation. The fan was plugged into a full outlet after checking the working condition when the switch was in the ON or OFF position.

The load of rice husk fuel into the reactor is by directly pouring the fuel from the container with one full load of fuel used per replication. Pieces of paper were used for easy start-up by pouring drops of it on the fuel column. The water-boiling test was conducted as illustrated in Fig. 2 and 3 below.



a)



b)

Fig. 3. Water boiling test using a data logger for non-insulated type gasifier



a)



b)

Fig. 2. Water boiling test using a data logger with the computer for insulated type gasifier

The reactor was closed by placing the burner on top of it when the rice husk in the reactor was observed to be burning. After allowing the rice husk to burn for a minute, the gas was ignited at the burner. The startup time was recorded until a luminous blue flame was produced. Then the operation time was started to record both with place a casserole and with an aluminum pot on top of the burner and without a pot. When all the rice husk is completely burned or when the stove stops producing gas, it means that the operation is finished; the total operation time was recorded, and shut OFF the fan with the SEAFLO Inline blower, model: SFLB1-270-02. The burned rice husk (bio-char) was immediately discharged cooled and weighed bio-char.

EXPERIMENTAL DESIGN

The experiment design for the performance evaluation and modeling of the rice husk gasifier stove was a completely randomized design (CRD) having two stove types viz: non-insulated and insulated gasifier stoves as treatments on the cooking of boiling water and with no-cooking with three replications. The material properties of the gasifier stoves are the basic characteristics used to determine the heat transfer property. The gasifier stove reactor is the component of the stove where rice husks are placed and burned with a limited amount of air. The details of the two treatments are illustrated here below.

1. **The insulated type gasifier stoves:** The mild steel reactor of the insulated stove type has an annular spacing of 2cm and measures 3 cm on the outside and 2 cm on the inside. This reactor is cylindrical in shape, having a diameter of 0.15 m, height of 0.565 m, and volume of 0.010 m³. Unlike the non-insulated one, it is the burned biochar or rice husk ash acts as a heat-retaining barrier in the annular space between the inner and outside of the reactor to reduce heat loss. This cylinder of the insulated one is provided with an annular space of 2 cm, where the burned rice husks or ash is placed to serve as insulation to prevent heat loss in the gasifier for the insulated type of stove (Fig. 4a). The burning layer of rice husks, also known as the combustion zone, descends the reactor when the fuel is ignited from the top, depending on how much air is provided by the fan [8]. At the lower end of the reactor is a fuel grate made of stainless steel material, which is used to hold the rice husks during gasification.
2. **The non-insulated type gasifier stoves:** The non-insulated type stove has a reactor with a cylinder shape made up of 3mm mild steel. It was made up of mild steel of 3mm thickness and was only one-sided. This reactor is cylindrical in shape, having a diameter of 0.19 m, height of 0.665m, and volume of 0.019 m³. Hence, during burning, it has not a heat-retaining barrier on the reactor to keep heat from escaping the gasifier. The burning layer of rice husks, also known as the combustion zone, descends the reactor when the fuel is ignited from the top, depending on how much air is provided by the fan [8]. In addition, the outside parts of the reactor or combustion zone are very hot during burning because of heat loss through the outside of the reactor (Fig. 4b). At the lower end of the reactor is a fuel grate made of stainless steel material, which is used to hold the rice husks during gasification for both insulated and non-insulated types of gasifiers.



Fig. 4. The rice husk gasifier stove (a) the non-insulated type and (b) insulated type gasifier stoves

DATA COLLECTED

The multiple regression analysis was made to analyze and establish a relationship between the heat energy and the operating time of both gasifier stoves for both heat energies produced and lost. The heat energy provided by the burning of the rice husk in the reactor of the stove and associated heat losses at the outside of the reactor were estimated for both types of stoves through the change in temperature concerning operating time using the Squirrel 2020 SQ2020/2F8 data logger. The regression analysis using the relationship between heat energy produced and the operating time of both types of stoves was expressed using a polynomial regression model using the equation and fitting curve. The variables/parameters described below were recorded in each three replications along with the treatments of both gasifiers. Hence, the following parameters are used during evaluating the rice husk for energy:

1. **Start-Up Time:** It is the time required to ignite the rice husk and consequently produce combustible gas. The start-up time was measured using a stop watch where the time burning pieces of paper are introduced to the fuel in the reactor until combustible gas is produced at the burner and repeated three times.
2. **Operating Time:** It is the duration from the time of gasifier produces a combustible gas until no more gas is obtained from the burning of the rice husk and measured using a stopwatch with three replications.
3. **Fuel Consumption Rate (FCR):** FCR is the amount of rice husk fuel used in operating the stove divided by the operating time within three replications. The weight of dried rice husk was measured using a weight balance at 9.97%, average moisture content. The FCR was computed using the equation (1) below [8]:

$$FCR = \frac{\text{Weight of Rice Husk Fuel Used (kg)}}{\text{Operating Time (hr)}} \quad (1)$$

4. **Specific Gasification Rate (SGR):** SGR is the amount of Rice husk fuel used per unit time per unit area of the reactor. It was measured for treatments of both gasifiers per replications and computed using equation (2) [8]:

$$SGR = \frac{\text{Weight of Rice Husk Fuel Used (kg)}}{\text{Reactor area (m}^2\text{) x Operating Time (hr)}} \quad (2)$$

5. **Combustion Zone Rate (CZR):** The time required for the combustion zone to move down through the reactor is Combustion Zone Rate (CZR). It was computed in each replication and computed using the equation (3) [8]:

$$CZR = \frac{\text{Length of the Reactor (m)}}{\text{Operating Time (hr)}} \quad (3)$$

6. **Boiling Time:** This is the time required for the water to boil starting from the moment the pot is placed on the burner until the temperature of the water reaches 100°C [8]. It was replicated three times for 2 liters of water using a 2 mm thickness aluminum pot without a lid.
7. **Sensible Heat:** This is the amount of heat energy required to raise the temperature of the water. This is measured before and after the water reaches the boiling temperature. It was repeated for three replications and computed using the equation (4) [8]:

$$SH = Mw \times Cp \times (Tf - Ti) \quad \text{Where:} \quad (4)$$

SH = sensible heat, Kcal,
 Cp = specific heat of water, 1 Kcal/kg-°C,
 Tf = temperature of water at boiling, Approx. 100°C, Mw = the mass of water, kg (1kg/liter),
 Ti = temperature of the water before boiling, 27-30°C

8. **Latent Heat:** This is the amount of heat energy used to evaporate water. The amount of evaporated water from the initial 2 liters of water was measured after completion of the complete burning of husk fuel from each replication and computed using the equation (5) [8]:

$$Lh = We \times Hfg \quad (5)$$

Where:

L_H = latent Heat, Kcal
 H_{fg} = latent heat of water, 540 Kcal/kg
 We = the weight of water evaporated, kg,

9. **Heat Energy Input:** It is the amount of heat energy available in the rice husk fuel. The heat energy input was estimated in three replications and computed using the equation (6) [8]:

$$QF = We \times Hfg \quad (6)$$

Where:

QF = heat energy available in the fuel, Kcal,
 WFU = the weight of rice husk used in the stove, kg
 HVF = the heating value of rice husk, Kcal/kg

10. **Thermal Efficiency:** This is the ratio of the energy used in boiling and evaporating water to the heat energy available in the fuel per each replication and computed using the equation (7) [8].

$$TE = \frac{Sh + LH}{HF + WF} \times 100 \quad (7)$$

Where:

TE = thermal efficiency, %
 LH = latent heat, Kcal
 Sh = sensible heat, Kcal,
 HF = the heating value of fuel, Kcal/kg,
 WF = the weight of fuel used, kg

11. **Input Power of Rice Husk:** This is the amount of energy supplied to the stove based on the amount of rice husk consumed in each replication and computed using the equation (8) [8].

$$Pi = 0.0012 \times FCR \times HVF \quad (8)$$

Where:

Pi = power input, Kw,
 FCR = fuel consumption rate, kg/hr,
 HVF = the heating value of fuel, Kcal/kg

12. **Input power of Fan:** The total consumed electric power in the working load of the air blower was measured in each replication. The SEAFLO Inline blower, model, SFLB1-270-02 was used and the input power of the fan was calculated by the following equation (9) [10]:

$$E_f = P \times I \quad (9)$$

Where:

I = line current strength (Ampere) and
 V = potential difference (Voltage).

13. **Power Output:** This is the amount of energy released by the stove for cooking. It was computed using the equation (10) per each replication [8]:

$$Po = FCR \times HVF \times TE \quad (10)$$

Where:

Po = power output, kW,
 FCR = fuel consumption rate, kg/hr.,
 HVF = the heating value of fuel, Kcal/kg, TE = thermal efficiency and percentage

14. **Char Produced (%):** This is the ratio of the amount of char produced after the complete burning of rice husks. The char produced can be computed per each replication using the equation (11) [8]:

$$\%Char = \frac{\text{Weight of char (kg)}}{\text{Weight of dried Water Hyacinth used (kg)}} \quad (11)$$

15. **Heat Energy:** The heat energy produced at the burner of the stove and heat loss through the combustion zone of the stove to the outside environment where raising the temperature to a desired level was considered. The heat energy produced in the gasifier stove was calculated using the equation (12) provided by [11].

$$M_h C_p (T_i - T_f) \quad (12)$$

Where:

M_h = mass of husk, kg
 C_p = the specific heat capacity of the produce, (kJ/kg°C)
 T_i = the room temperature during the test, °C, T_f = the temperature produced by burning in the burner, °C

DATA ANALYSIS

The least significant difference (LSD) test was applied to determine differences between treatments using a 5% probability level. The significant difference in levels for each experiment was tested using the LSD test. A p < 0.05 was considered statistically significant. Data were subjected to analysis of variance (ANOVA) using statically producer as described by [12].

III. RESULT AND DISCUSSION

The performance evaluation of the gasifier stove was conducted at an average moisture content of husk on a wet basis of 9.97%, with both insulated and non-insulated types of gasifier stoves. The relative humidity and temperature of the testing room were 42.78% and 26.43 °C, respectively. Both gasifier stoves were evaluated in full load conditions where the husk was collected from local millers that are produced during usual milling with a bulk density of 130.05 kg/m³.

A. PERFORMANCE OF GASIFIER STOVES

Operations of both insulated and non-insulated gasifier stoves were initiated using small pieces of paper. The ignition time or the time required to start to ignite the insulated and non-insulated gasifier stoves are 3.86 and 4.65 minutes, respectively. The insulated gasifier has a relatively lower start-up time than the non-insulated type, but statistically, there is no significant difference at a 5% probability level. The change in temperature of the gasifier stoves concerning the start-up time was not significant and graphically showed that it is a straight line over time, as shown in Figs. 5 and 6 below. After the startup time of the stoves was recorded, it was operating time when it was fully in operation until the burning of rice husk was finished. The operation times in one batch feed of husk of both insulated and non-insulated gasifier stoves are 33.888 and 39.672 minutes, respectively, but there is no statistical difference. The amount of husk consumed per batch of insulated and non-insulated gasifier stoves was also 1.1802 and 2.5106 kg, respectively. As shown in Fig. 5, the maximum flame temperature was 1,190.30 °C at a room temperature of 27.33 °C, whereas the average temperature was 758.916 °C for the non-insulated type gasifier stove. On the other hand, the maximum and average temperatures of the insulated gasifier stove were also 518.300 °C and 289.014 °C, respectively, at the same room temperature as shown in Fig. 6, which was in line with similar findings [8].

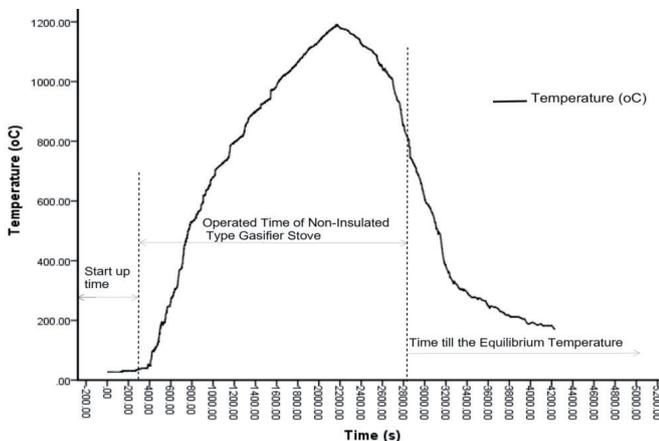


Fig. 5. The relationship between burning temperature (°C) and burning time (s) of a non-insulated type gasifier stove

On the other hand, the maximum and average temperatures of the insulated gasifier stove were 518.30 °C and 289.014 °C, respectively, at the same room temperature as indicated in Fig 6. Belonio (2006) found that insulated gasifier stoves produced flame temperatures ranging from 465 to 610 °C, which was consistent with previous findings for the insulated type [8]. It was also observed that the Paul Oliver rice husk gasifier stove, which is very similar in design to the non-insulated type gasifier stove, has a maximum burning temperature of around 700 °C [13].

The insulated type gasifier stove reactor was insulated using biochar, which filled the annular space between the inside and outside mild steel sheet. This insulation resulted in lower temperatures and reduced heat expansion throughout the reactor wall to the outside

environment, indicating that the insulated-type gasifier stove was more effective in preventing heat loss. The temperature of a gasifier stove increases from startup time to maximum values, where fuel ignites from the top to bottom of the reactor. The temperature declines with the amount of husk in the reactor, and when the rice husk is burned, the flame is stopped, and the temperature declines sharply to room temperature. The residual temperature of insulated and non-insulated gasifier stoves starts at 330.70 and 817.60 °C, respectively, after burning the husk as shown in Figs. 5 and 6. The temperature-time graph profile of the non-insulated type gasifier stove as shown in Fig. 5 is much more in line with other findings [13]. According to reports revealed, the flame temperature of rice husks for Rice Husk Gasifier Stoves (Belonio Type) starts to decline after around 800 °C, which was lower and higher than the non-insulated and insulated type gasifier stoves, respectively [13].

The residual temperature is also maximum for the non-insulated type gasifier stove, as shown in Fig. 5 and 6. The burning of fuel in the combustion zone moves downward along the height of the reactor, determining the operating time for the conversion of burned rice husks to biochar. The relationship between burning temperature and time shows a similar shape for both types of stoves, with sharp declines after burning the husk but slow cooling to room temperature. The fuel burning zone in stoves was moved downward along the reactor height, with the height of the reactor for both insulated and non-insulated gasifier stoves determining the operating time for the conversion of rice husks to biochar. Generally, the relationship between the burning temperature and time showed a relatively similar shape for both types of stoves, with sharp declines after burning of the husk but slow to reach an equilibrium temperature.

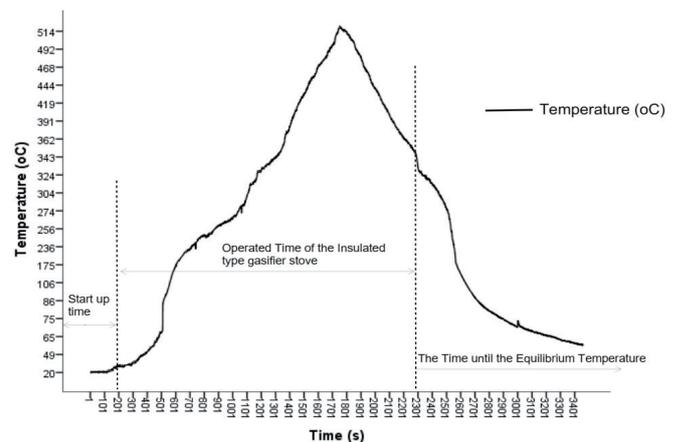


Fig. 6. The relationship between burning temperature (°C) and burning time (s) of the insulated type gasifier stove

B. FUEL CONSUMPTION

As shown in Figs. 5 and 6, the operating time is the basic factor for the temperature change that indirectly influences some parameters like fuel consumption rate, specific gasification rate, and combustion zone rate of stoves. At a 5% significance level, the fuel consumption rate significantly influences the types of gasifier stoves, with the maximum fuel consumption rate for non-insulated and insulated types being 3.820 and 2.099 kg/hr, respectively. The observed result of an insulated type of gasifier stove is in line with the fuel consumption rate of the insulated type of stove, which ranges from 1.59 to 2.0 kg per hour, [8]. Moreover, the time to consume rice husks to completely gasify the rice husks in the reactor depends on the density of the rice husk, the volume of the reactor, and the fuel consumption rate, which determines the total time to consume the rice husk. The volumes of the reactors for non-insulated and insulated-type gasifier stoves are 0.019 and 0.010 m³, respectively, and the rice husk consumption per batch was 2.512

and 1.180 kg, respectively. It was observed that the non-insulated type of gasifier stove has a higher fuel consumption rate than the non-insulated one. On the other hand, the amount of rice husk fuel used per unit time per unit area of the reactor *i.e.* specific gasification rate did not significantly differ on the types of stoves at a 5% significant level. The average specific gasification rate of insulated and non-insulated types of stoves was 106.45 and 120.63 kg/m²h, respectively; however, it was higher than the 56.81 kg per hr-m² that was the same design with the insulated type observed by [8].

The volume of the reactor and the amount of rice husk held per batch of the insulated type are nearly half of the non-insulated type of the stove; however, despite this size, it does not show significant differences in the specific gasification rate. The time required for the combustion zone to move downward to the reactor of the stove's so-called combustion zone rate on the type of stove was not significant at a 5% level of significance. The combustion zone rates of the insulated and non-insulated types of stoves were 1.015 and 1.004 m/h, respectively. The combustion zone rate was also directly proportional to the length of the reactor, where it was 0.665 and 0.565 m for non-insulated and insulated-type gasifier stoves, respectively. However, the size of the reactor of the insulated type is significantly smaller than the non-insulated type of the stove. The same conditions with the volume of the reactor were 0.019 and 0.010 m³ for the non-insulated and the insulated types of the stoves, respectively, which directly influenced the values of the fuel consumption rate, specific gasification rate, and combustion zone rate of the stoves but did not significantly affect the insulation property of the stove due to the difference in volume and length of the reactors between the stoves. This showed that the fuel (rice husk) holding capacity of the reactor of each type of stove is significant at a 5% level, where the amount of rice husk and biochar produced was 1.18kg and 0.27kg for the insulated type and 2.511kg and 0.688kg for the non-insulated type of stoves, respectively.

C. WATER BOILING TEST

The time required for the water to boil starts from the moment that the pot is placed on the burner until the temperature of the water reaches 100 °C, which is a significant difference between the insulated and non-insulated types of gasifier stoves at a 5% level of significance. Boiling time using 2 liters of water, boiling from 26°C to 100°C, the time consumed ranges from 8.51 and 12.80 minutes for the non-insulated and insulated types of gasifier stoves, respectively, which indicates the water boiling time for the non-insulated type of gasifier stove is shorter than the non-insulated one while it was much lower than 16- 25 minutes for insulated types of stove obtained to boil the same amount of water [8].

As shown in Fig. 7, after the startup time, the temperature of the water sharply increased up to 207.70 °C, and then it became constant at 205–207 °C for 26.36 minutes. It is in line with the measured gas temperature of water boiling ranges from 160 to 210 °C [8]. The maximum temperature recorded during the boiling of the water was 208.80 °C, which gradually declined until the end of the burning of the husk and the residual temperature of the water reached equilibrium to room temperature (Fig. 7). On the other hand, the amount of water boiled from boiling of two liters of sample water was significant at a 5% level of significance, where the average water boiled for insulated and non-insulated was 1.077 and 0.950 liters, respectively. Unlike the boiling time, the amount of water boiled for the insulated type gasifier stove is higher than the non-insulated type gasifier stove.

The time required to boil water in the insulated-type rice husk gasifier stove to boil two liters of water took 12.80 minutes, which is less than the same stove boiling time of 16–21 minutes [8]. As shown in Fig. 8, the shape of the time versus temperature graph was a dome shape where the temperature increased sharply to the

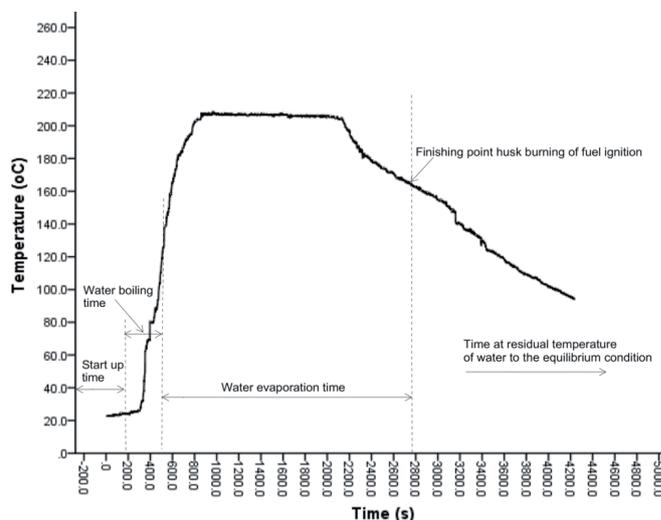


Fig. 7. The boiling temperature (°C) and time (s) of a non-insulated type gasifier stove

maximum range of 124.9 °C. The maximum and average temperatures recorded were 124.9 and 92.99 °C, respectively. Unlike the average and maximum temperature, the amount of water boiled for an insulated gasifier stove is greater than the non-insulated type.

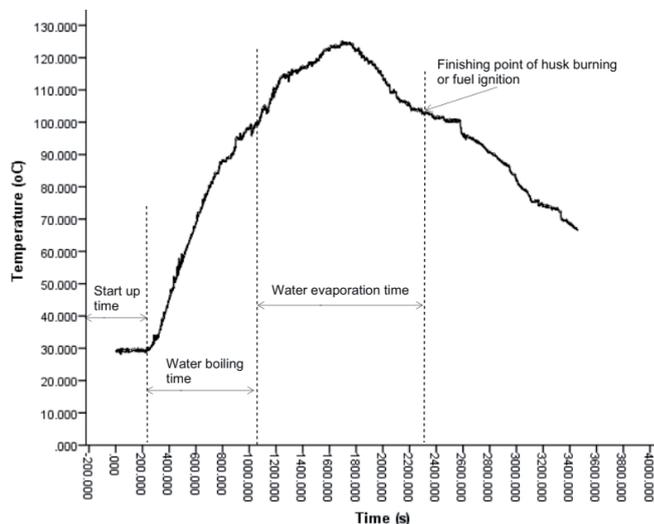


Fig. 8. The boiling temperature (°C) and time (s) of the insulated-type gasifier stove

Moreover, the sensible heat (KJ) is not significantly different between the types of gasifier stoves at a 5% significant level. The average sensible heat of insulated and non-insulated gasifier stoves is 299.96 and 305.11 KJ, respectively. Sensible heat is the product of mass, specific heat, and the temperature difference of water. Hence, the sensible heat of the insulated gasifier stove is relatively lower than that of the non-insulated stove because, to estimate the gasifier stoves, the factors caused by temperature differences are higher on non-insulated gasifier stoves, which is why mass and specific heat are common for both types of gasifier stoves. On the other hand, the latent heat (kJ) is a significant difference in the types of gasifier stoves at a 5% level. The average latent heat of insulated and non-insulated types of gasifier stoves is 2424.4 and 2139.2 kJ, respectively. Unlike the sensible heat of the gasifiers, the latent heat of the insulated type is greater than the non-insulated one, where it mainly depends on the water evaporated during the boiling of the water. In this condition, latent heat depends on the amount of water boiled. It was observed that the average water boiled for insulated and non-insulated types of gasifier stoves is 1.065 and 0.95 liters, respectively. This showed that with these results, the insulated rice husk gas stove is sufficient to provide energy for

a family for cooking, and some excess energy can be used to heat water for bathing [8].

D. THERMAL EFFICIENCY OF THE STOVE

The amount of energy supplied to the stoves depends on the amount of fuel consumed and air supplied by the fan. This energy depends on the heating value and the amount of husk and energy needed to drive the fan, *i.e.*, the input power source for the gasifier stoves. Based on the data observed on the performance of gasifiers, it was indicated that the biochar conversion rate (%) has shown a significant difference among the types of gasifiers at a 5% significance level. The mean biochar conversion rates of non-insulated and insulated gasifier stoves are 27.337% and 22.854%, respectively, which is lower than the 35% found by Belonio, (2005). It indicated that the mass of biochar produced per rice husk of the non-insulated type is higher than the insulated one, which shows that the insulated gasifier stove was better at burning the husk completely. Hence, the input power supplied was 13.389 kW and 7.4151 kW for non-insulated and insulated gasifier stoves, respectively, which showed the maximum input power was 13.389 kW for non-insulated type gasifier stoves, while the power input for the insulated type of stove was similar, with 5.724 to 7.200 kW for the insulated type of stove observed by Belonio (2005). However, the insulated and non-insulated gasifiers estimated thermal efficiency (%) was 18.469% and 7.8025%, respectively, with highly significant differences among the stoves at a 5% level, which showed the insulated gasifier stove recorded higher thermal efficiency, while the thermal efficiency found by Belonio (2005) was in the range of 12.28 to 13.83%. Moreover, the output powers (kW) for insulated and non-insulated gasifier stoves are 1.3440 and 1.0344, respectively; hence, it is higher for the insulated stove, ranging from 0.749 to 0.909 kW [8]. Therefore, it can be recommended that the stove be insulated with rice husk ash as a good insulating material to obtain higher thermal efficiency. On the other hand, due to its high silica content and being very cheap, since it can be easily obtained from the burned rice husks found on roadsides or in the field, rice husk ash is a good choice for insulation with higher thermal efficiency.

E. ANALYSIS OF THE MULTIPLE REGRESSION MODEL

The heat energy in the reactor of gasifier stoves from the burning of rice husks was estimated using the recorded temperature concerning the operating time. Before developing the polynomial regression models, the experimental temperature or heat energy data were plotted against the time-elapsed parameters separately for each sampling point to get a visual insight into the relationship between the time and the temperature or heat energy (Figs. 5-8). Those figures revealed the dependency of heat energy and temperature over time. The multiple regression analysis was used to model this relationship between burning time and temperature/heat energy during the evaluation of gasifier stoves. The result from polynomial regression of linear, quadratic, and cubic analysis was the three models used to explain the relationship between times elapsed, or the independent variable, and temperature or heat energy, or the de-

pendent variable, which was used as a criterion for inclusion in the model. Therefore, the relationship between changes in heat energy throughout the operating time was analyzed through a polynomial regression model using the equation and fitting curve.

E. I. ANALYSIS OF HEAT ENERGY

The heat energy generated per unit of time is a variable entered into multiple regressions that are used to analyze and establish a relationship between the time (t) in seconds and heat energy (Q) in joules for both insulated and non-insulated types of gasifier stoves.

E..I.I. HEAT GENERATION OF THE INSULATED TYPE GASIFIER STOVE

The polynomial regression to model the relationship between the heat energy or dependent variable and multiple explanatory variables *i.e.* time of the insulated type of gasifier stove was made using linear, quadratics, and cubic equations at the coefficient of determination (R^2) of 0.09, 0.90, and 0.95 respectively as shown in Eq. 13, Eq. 14 and Eq. 15 below. The analysis of models to build and select the variable to decide if a variable term can be removed or added without affecting the model significantly. In this case, the larger model or full model is Eq.3 or a cubic polynomial model whereas the remaining Eq. 1 and Eq. 2 are linear and quadratics models respectively. Among the polynomial models, which one significantly, decreased the error and significantly increased the predictive power of the model or improved the model expression is the main thing that makes sense in this concept.

$$Q = 0.083t + 270.950, \quad R^2 = 0.09 \quad (13)$$

$$Q = 144.43 + 1043t - 0.0004t^2, \quad R^2 = 0.90 \quad (14)$$

$$Q = -23.192 + 0.483t + 2 \times 10^{-4}t^2 - 1.386 \times 10^{-7}t^3, \quad R^2 = 0.95 \quad (15)$$

Hence, an analysis of variance (ANOVA) of the three models was made to conclude on the idea of how far the observed heat generated (Q) is from the predicted or fitted heat generated value. On the other hand, adding or reducing the model to make it either significantly better or significantly worse is essentially determined using the partial F test and the sum of squares error. The regression model of linear, quadratic, and cubic functions residual standard error (RSE) and coefficient of determination (R^2) was shown in Table 1 below, which revealed that the cubic model was highest in R^2 , lowest in RSE with 0.951, and 45.594, respectively. It can be concluded that the lowest RSE showed the model predicted heat generated (Q) value is closest to the observed heat generated (Q) values or the model most wisely fits than the remaining linear and quadratic models. Besides, to check whether at least one model is significantly better or there is no difference between the three polynomial models, the ANOVA, or partial F-test, was applied. Hence, the ANOVA between linear, quadratics, and cubic models indicated that the full model, or cubic model, is significantly better than the remaining reduced models (linear and quadratics) at $P > 0.001$, as shown in Table 1.

TABLE I.
POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF HEAT GENERATED WITHIN TIME ELAPSE FOR INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R- Square
	Constant	t	t ²	t ³	
Linear	270.30*** (7.72)	0.083*** (0.005)	-	-	0.090 (196.525)
Quadratic	-144.42*** (3.81)	1.043*** (0.007)	-3.7e-4*** (8.39e-20)		0.902 (64.55)
Cubic	-23.20*** (1.659)	0.483*** (0.012)	-2.01e-4*** (4.96e-19)	-1.386e-7* (1.24e-22)	0.951 (45.594)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1,

The graphical presentation of the observed heat generated compared with the three models (linear, quadratic, and cubic) to show how well it fits or predicts the observed data is shown in Fig 9 below. The lines colored black, blue, and red with green in the graph are linear, quadratic, and cubic models with observed heat-generated values, respectively. The visualizations of the polynomial model fit for the heat generated in the insulated type gasifier stove are shown in Figure 6 below. On the graph in Fig 9, the observed heat generated after 2600 seconds was heat energy generated by the residual temperature, which remains until the equilibrium condition with room temperature or until no heat energy is generated.


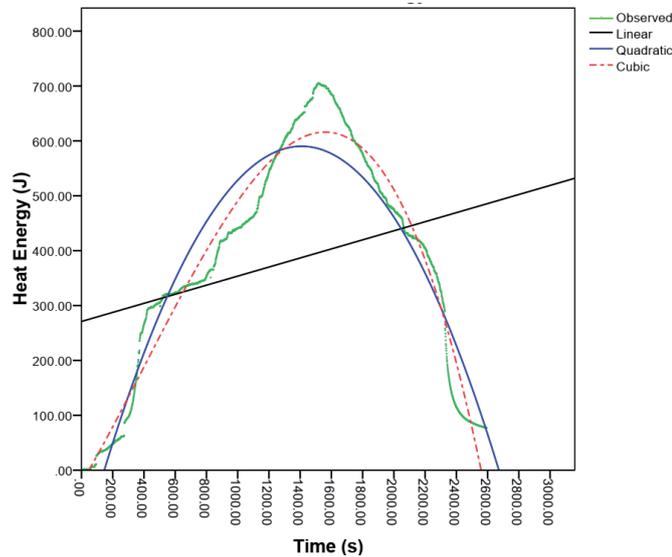



Fig. 9. Visualizations of the polynomial model fit for the heat generated in the insulated type gasifier stove

As shown in Fig. 10a, the 95% confidence interval (CI) for the fit provides a range of likely values for the mean generated heat energy (J) given the specified settings of the elapsed time (s). It is 95% confident that the confidence interval contains the population means for the heat-generated values of the variables in the model. The prediction interval (PI) is a range that is likely to contain a single future response for determining the heat energy generated and the time (s) of the insulated-type gasifier stove. The 95% PI is always wider than the CI due to the added uncertainty involved in predicting a single response of heat energy versus the mean response (Fig. 10a). Fig. 10b is the best-fit model for heat generation in the insulated type gasifier stove that was the cubic polynomial model, which was the normal probability plot that was approximately normally distributed. The data were plotted against a theoretical normal distribution, which forms an approximate straight line. Departures from this straight line indicate departures from normality, as shown in Fig. 10b. Fig. 10c, is also the residuals versus fits graph plots of the residuals on the y-axis and the fitted values on the x-axis, verifying the assumption that the residuals are randomly distributed and have constant variance. The points fell randomly on both sides of zero, with no recognizable patterns in the points. The histogram of the residuals shows the distribution of the residuals for all observations to determine whether the data are skewed or include outliers (Fig. 10d). Fig. 10e, residuals versus order in the plot displays the residuals in the order that the data were collected, verifying the assumption that the residuals are independent of one another. Independent residuals show no trends or patterns when displayed in time order, and the residuals on the plot should fall randomly around the centerline (Fig. 10e). In general, the best-fit model is a cubic model where the regression equation is:


$$Q = -23.192 + 0.483t + 2 \times 10^{-4}t^2 - 1.386 \times 10^{-7}t^3$$

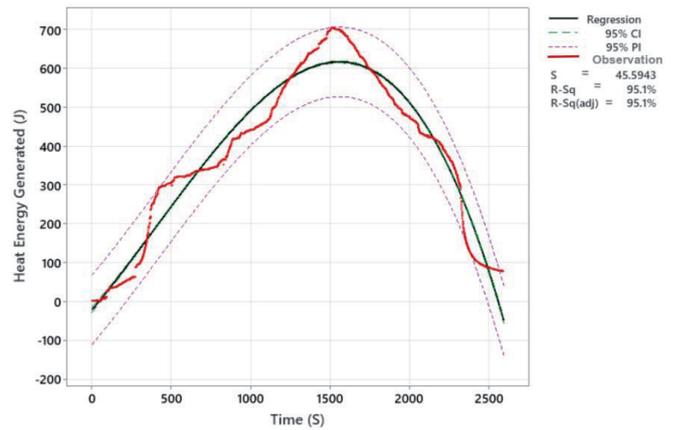


a)

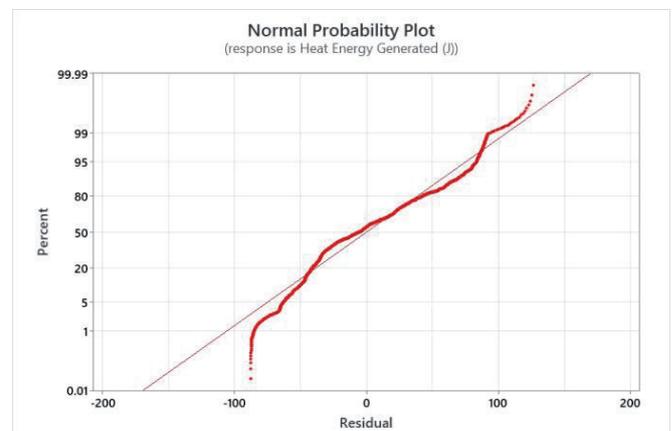


b)

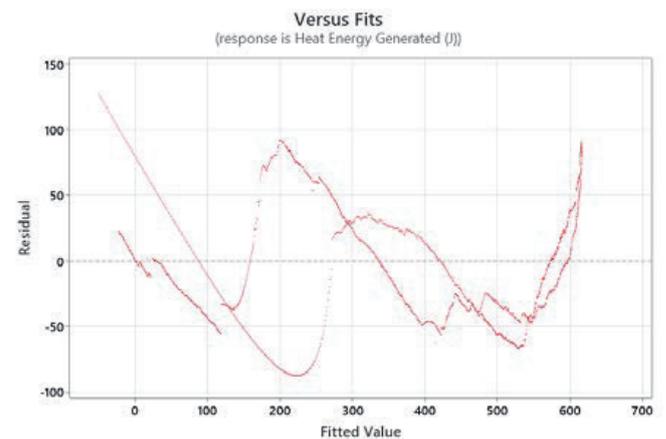

c)

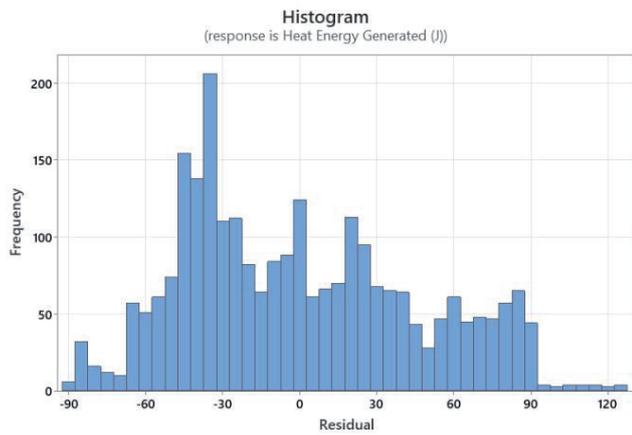

d)

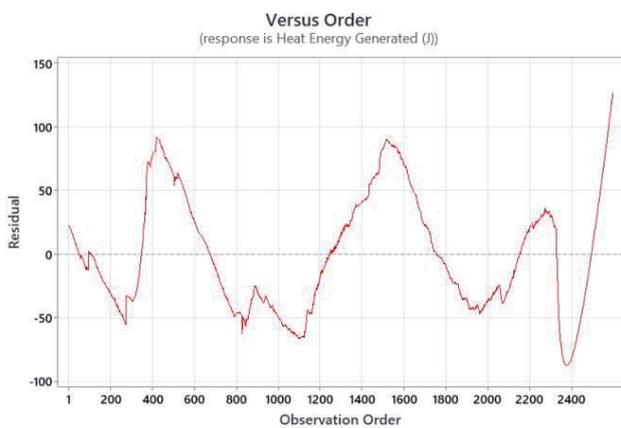

e)

Figure 10. The Polynomial Regression Analysis: Heat Energy Generated (J) versus Time (S) of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e) of the insulated type gasifier stove.

E.1.3. HEAT GENERATION OF THE NON-INSULATED TYPE GASIFIER STOVE

The heat energy generated by the non-insulate type gasifier stove within time was estimated using the model of the multiple polynomial regressions for linear, quadratic, and cubic equations at the coefficient of determination (R^2) of 0.023, 0.90, and 0.95, respectively, as shown in Eqs. 16, 17, and 18 below. The regression model to determine the fit for the heat generated in the non-insulated type gasifier stove was estimated using three models, but the important thing is which model perfectly fits the observed values of heat generated. Among the polynomial models, which one significantly decreased the error, significantly increased the predictive power of the model, or improved the model expression? The equations of the three polynomial models are shown in Eqs. 4, 5, and 6 below.

$$Q = 0.163t + 1958.39, \quad R^2 = 0.023 \quad (16)$$

$$Q = -233.19 + 4.345t - 0.001t^2, \quad R^2 = 0.968 \quad (17)$$

$$Q = -25.23 + 3.55t - 1.33 \times 10^{-3}t^2 - 1.33 \times 10^{-7}t^3, \quad R^2 = 0.974 \quad (18)$$

The coefficient of determination (R^2), residual standard error (RSE), and ANOVA between the models were used to determine

the visualizations of the polynomial model fit of the model predicted value to the observed data of heat generated in the non-insulated type gasifier stove. Hence, the residual standard errors (RSE) of linear, quadratic, and cubic models are 996.142, 181.463, and 163.637, respectively. The cubic polynomial model is the list standard error, indicating that the predicted values are closer to the observed values than the other models. The coefficients of determination (R^2) of linear, quadratic, and cubic models were also 0.023, 0.968, and 0.974, respectively, as shown in Table 2 below. The cubic polynomial model has the highest values, revealing that the model could explain around 97.4% of variations in the heat generated. The analysis of variance (ANOVA) or the partial F-test between the three models also indicated that the full or cubic model is significantly better than the remaining models at $P > 0.001$. Hence, the cubic polynomial model provides a significant best fit with a significantly lower sum of square error, as shown in Table 2.

TABLE II.

POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF HEAT GENERATED WITHIN TIME ELAPSE FOR NON-INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R-Square
	Constant	t	t ²	t ³	
Linear	1958.39*** (35.53)	0.168*** (0.020)	-	-	0.023 (996.14)
Quadratic	-233.19*** (9.712)	4.345*** (0.014)	-0.001*** (3.213e-19)	-	0.968 (181.46)
Cubic	-25.23 (11.68)	3.55*** (0.032)	-1.33e-3*** (1.828e-18)	-1.33e-7* (4.82e-22)	0.974 (163.64)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1.

Figure 11, displays a graph illustrating the polynomial model fit for heat generated in a non-insulated gasifier stove. The predicted lines are red, blue, and black, while the observed heat-generated data plot is green. The cubic and quadratic models are better-fitted than the linear model. The heat generated after 3000.00 seconds is due to the residual stove temperature until equilibrium conditions are reached, or heat energy generation decreases until zero or no heat transfer occurs.



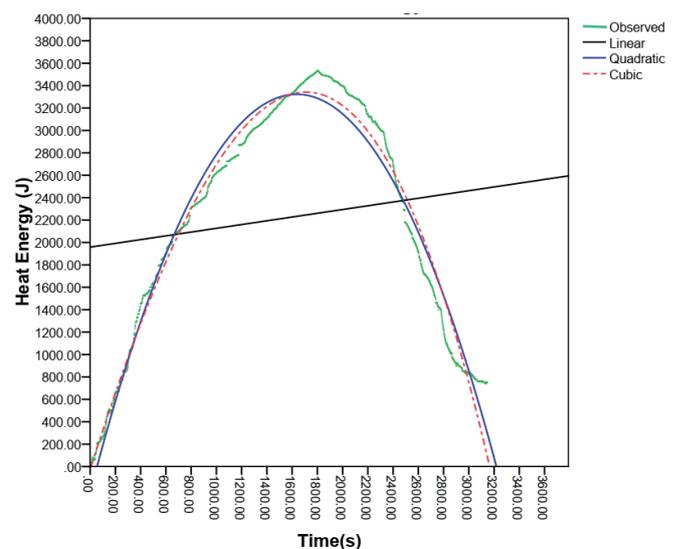


Fig. 11. Visualizations of the polynomial model fit for the heat generated in the non-insulated type gasifier stove


As shown in Fig. 12a, the 95% confidence interval (CI) for the cubic polynomial model fit provides a range of possible values for the mean heat energy generation at the designated burning period. This indicates that the population mean for the model's specified values of heat generation and time spent burning is contained within the confidence interval. For a given determination of heat energy generation and duration of burning variable settings, the 95% prediction interval (PI) is expected to include a single future response. The standard deviation of the distance between data values and fitted values measured in units of the response was 163.639 (Fig. 12a). Fig. 12b also, the normal probability plot of residuals displays the residuals versus their expected values when the distribution is normal, indicating a distribution with short tails (Fig. 12b). The residuals versus fits graph plots the residuals on the y-axis and the fitted values on the x-axis, verifying the assumption that the residuals are randomly distributed and have constant variance (Fig. 12c). Besides, as shown in Fig. 12d, the histogram of residuals shows the distribution of the residuals for all observations determined based on the number of intervals used to group the data, assessing the normality of the residuals. A histogram is most effective when there are approximately 20 or more data points (Fig. 12d). Fig. 12e, is the residuals versus order plot displays the residuals in the order in which the data were collected, verifying the assumption that the residuals are independent of one another. The independent residuals showed no trends or patterns when displayed in time order, suggesting that the residuals near each other may be correlated and thus not independent (Fig. 12e).

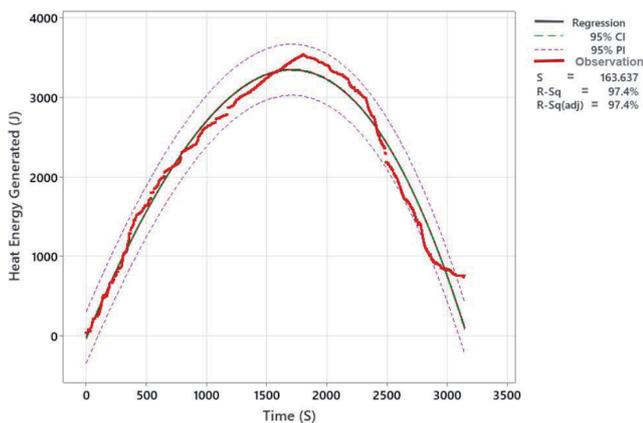


a)

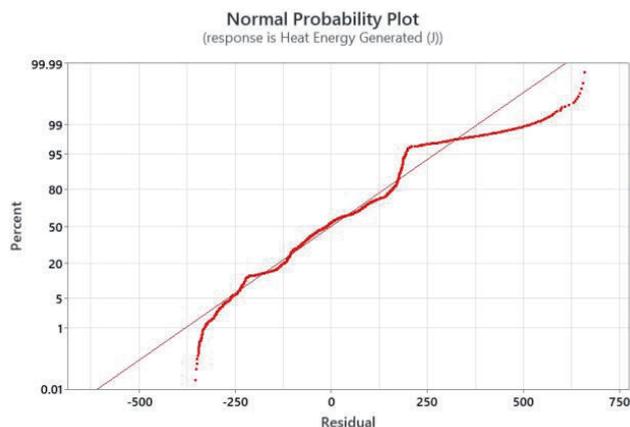


b)

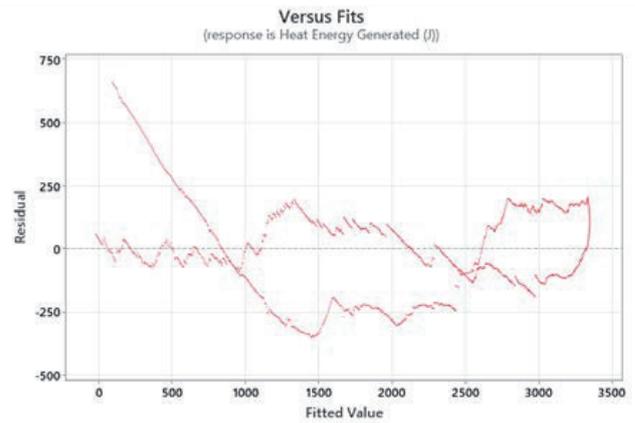

c)

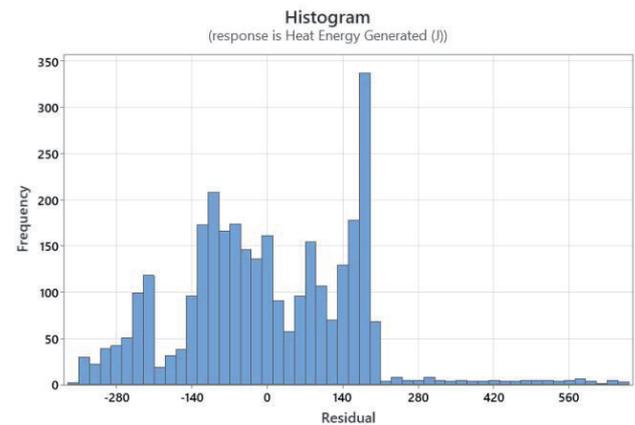

d)

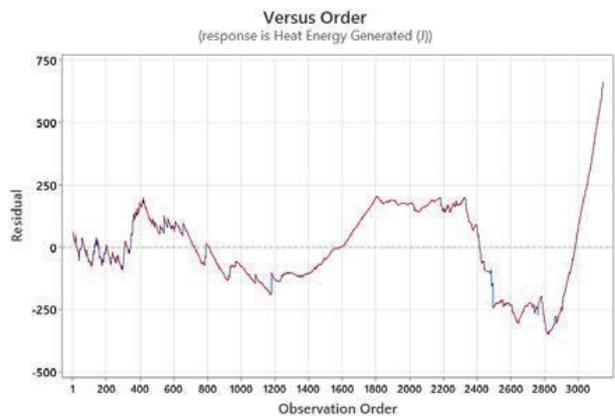

e)

Fig. 12. The Polynomial Regression Analysis: Heat Energy Generated (J) versus Time (S) of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e), of the non-insulated type gasifier stove.

E.1.4.1. ANALYSIS OF HEAT ENERGY LOSS

The energy loss through the reactor to the outside environment was recorded as the heat energy loss of the stoves. The relationship between the heat energy loss and the time elapsing, either going up and down together or not without causing one another, is an approach considered to be analyzed. The relation between energy loss and time was analyzed using the multiple regression model through polynomial regression using linear, quadratic, and cubic functions for both insulated and non-insulated gasifier stoves. The

residual standard errors (RSE), the coefficient of determination (R^2), and the partial F-test are used to test or determine whether a variable can be removed or added from a model without making a model significantly better or worse.

E.1.5. HEAT ENERGY LOSS OF THE INSULATED TYPE GASIFIER STOVE

The loss of heat energy of the insulated type gasifier stove was analyzed through the linear, quadratic, and cubic model functions as shown in Eqs. 19, 20, and 21 below, respectively. The residual standard error (RSE) of models was 6.794, 1.215, and 1.044 for linear, quadratic, and cubic models, respectively, to determine relationships among the models as shown in Table 3. It indicated that the quadratics and cubic models have a lower RSE than the linear model, for the closest models well-fit the predicted values to the observed heat loss data. The coefficients of determination (R^2) of linear, quadratic, and cubic models are also 0.641, 0.989, and 0.992, respectively. The R^2 of the two models revealed that they are well predicted, and the heat loss model fits very closely as compared to the reduced model or linear model. A simple model is always preferable if the reduced (quadratic) model is significantly better compared to the full model or cubic model.

$$Q = 0.011t - 10.769, \quad R^2 = 0.641 \quad (19)$$

$$Q = -1.157 \cdot 10^{-5}t^2 + 0.044t - 4.187, \quad R^2 = 0.989 \quad (20)$$

$$Q = -1.526 \cdot 10^{-9}t^3 - 5.201 \cdot 10^{-6}t^2 + 0.036t - 2.539, \quad R^2 = 0.992 \quad (21)$$

Moreover, the analysis of variance (ANOVA) using a partial F-test was used to determine if the models were significantly better; it checked for significant differences either for the determination of the models to improve or reduce the predictive power. The ANOVA indicated that there is a significant difference between a linear model with quadratics and a linear model with cubic models. However, there is not a significant difference between quadratics and cubic models at $P > 0.01$. Hence, a simple model is always preferable, where the full (cubic) model is not significantly better than the reduced (quadratic) model or if it is not necessary to include the cubic time of the model without making the model significantly worse or not significantly better.

TABLE III.

POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF HEAT ENERGY LOSS WITHIN TIME ELAPSE FOR INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R-Square
	Constant	t	t ²	t ³	
Linear	10.769*** (0.258)	0.011*** (10 ⁻⁴)	-	-	0.641 (6.794)
Quadratic	-4.187*** (0.069)	0.044*** (1.15e-4)	-1.16x10 ⁻⁵ *** (10 ⁻⁶)		0.989 (1.215)
Cubic	-2.539*** (0.079)	0.036*** (10 ⁻⁴)	-5.20x10 ⁻⁶ ** (10 ⁻⁴)	1.526x10 ⁻⁹ (1x10 ⁻⁴)	0.992 (1.044)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1.

The graph in Fig. 13 shows the visualizations of the polynomial model fit for the energy loss in the insulated type gasifier stove of all the observed heat energy loss data with predicted values of linear, quadratic, and cubic models. The maximum heat energy loss recorded on the insulated gasifier stove was 38.56J after 1919 seconds of operation, but steadily decreasing the heat loss up to the equilibrium condition of the room temperature, i.e., 2783 seconds of operation time, the graph gradually approaches zero and declines slowly. As shown in the graph in Fig. 13, the cubic and quadratic polynomial models approach each other with the observed heat loss data but gradually separate and increase the gap at the heat loss during the residual temperature of the stove. The red, blue, and black lines on the graph are cubic, quadratic, and linear model fit curves, respectively, whereas the green ones are the observed heat loss values.


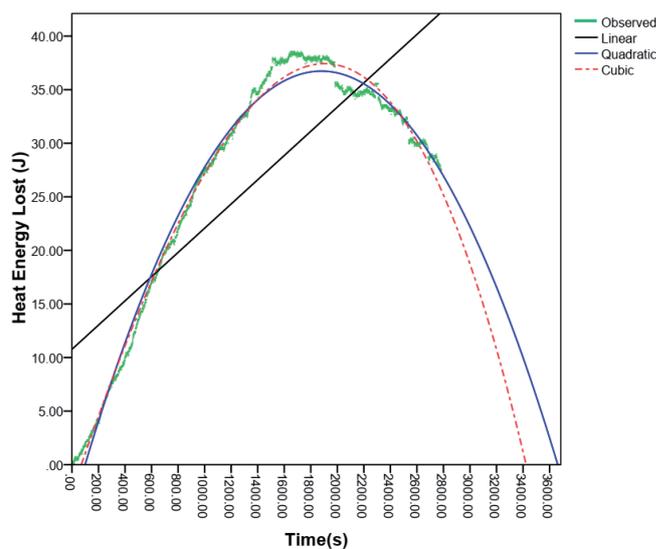


Fig. 13. Visualizations of the polynomial model fit for the heat energy loss in the insulated type gasifier stove

The cubic model is the best-fit polynomial model for determining heat energy loss and burning time variable settings. As shown in Fig. 14a, the 95% confidence interval (CI) provides a range of likely values for the mean response, while the 95% prediction interval (PI) is a range likely to contain a single future response. The confidence interval is 95% confident that the confidence interval contains the population mean for the specified values of variables in the model (Fig. 14a). Fig. 14b is also the normal probability plot of residuals displays the residuals versus their expected values when the distribution is normal, while the residuals versus fits graph plots show the residuals on the y-axis and the fitted values on the x-axis (Fig. 14b). The residuals versus fits plot confirm the assumption that the residuals are randomly distributed and have constant variance (Fig. 14c). The Fig. 14d is the histogram of residuals determines the appearance of the data, which depends on the number of intervals used to group the data. A histogram is most effective when there are approximately 20 or more data points (Fig. 14d). The residuals versus order plot (Fig. 14e) display the residuals in the order in which the data were collected, verifying the assumption that the residuals are independent of one another. Independent residuals show no trends or patterns when displayed in time order, where the residuals should fall randomly around the centerline (Fig. 14e).

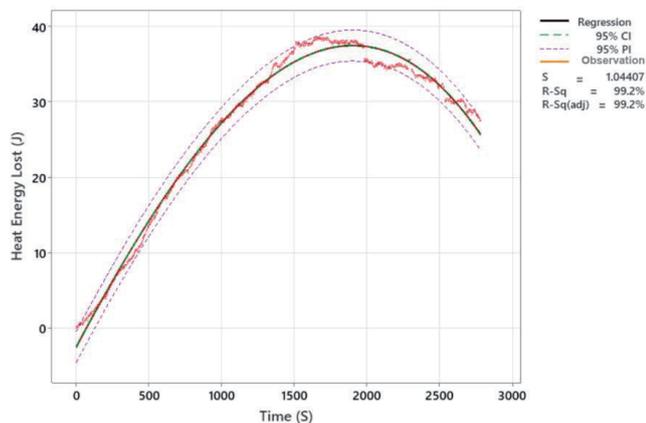

a)



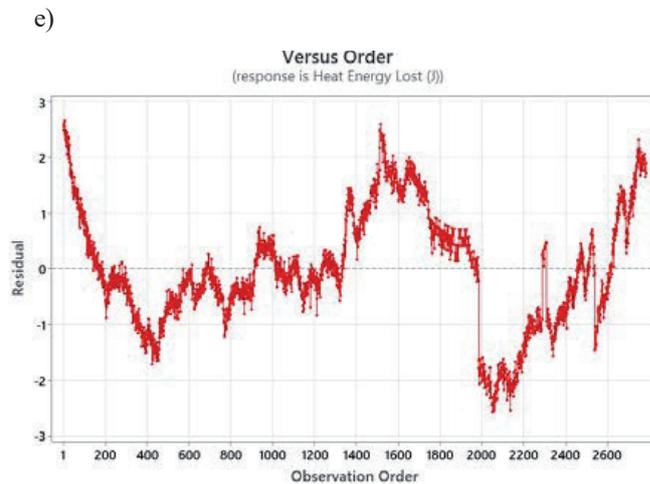



Fig. 14. The Polynomial Regression Analysis: The Heat Energy Loss by Insulated Type Gasifier Stove of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e) of the insulated type gasifier stove.

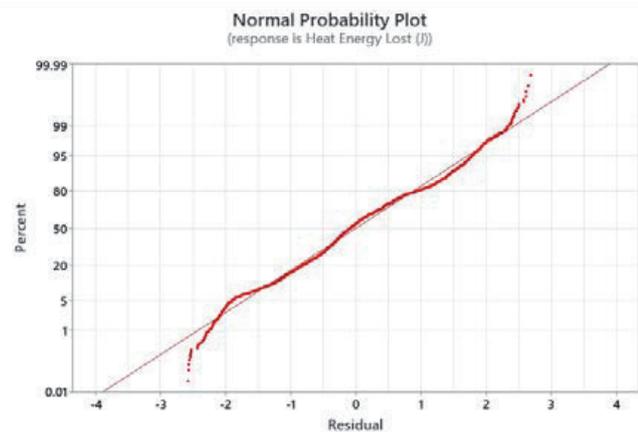

b)

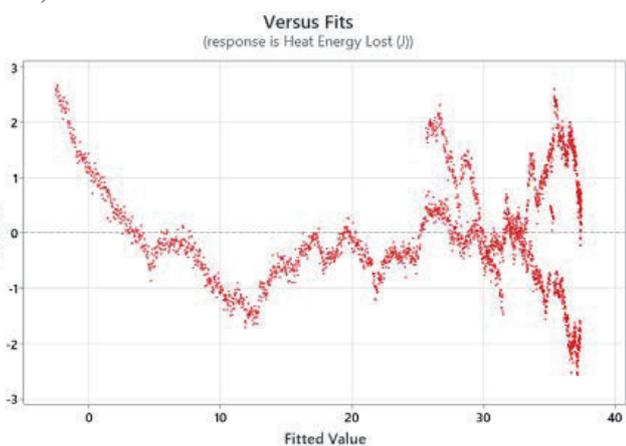

c)

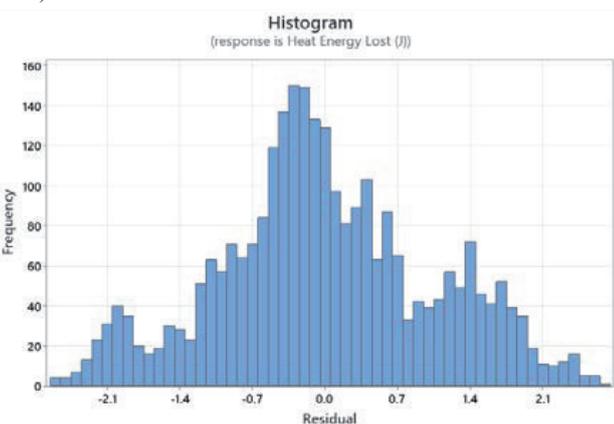

d)

E.1.4.2. HEAT ENERGY LOSS IN THE NON-INSULATED TYPE GASIFIER STOVE

The heat energy loss of the non-insulated type gasifier stove has been analyzed through the multiple regression model equations using the linear, quadratic, and cubic functions that are illustrated in Eqs. 22, 23, and 24, respectively. The determination of the best fit of the predicted values to the observed heat energy loss data was made among the models using residual standard error (RSE), coefficient of determination (R^2), and ANOVA, or partial F-test. The RSEs of the linear, quadratic, and cubic models are 268.72, 130.54, and 122.323, respectively, indicating that the cubic polynomial model is relatively better predictively than the linear and quadratic models. Besides, the linear model has the highest RSE, which was the worst model and should be ignored in the prediction of the observed heat energy loss data of the non-insulated type gasifier stove. The coefficients of determination (R^2) of the linear, quadratic, and cubic models are 0.04, 0.773, and 0.801, respectively, showing that the cubic model is relatively the best predictive model, where more than 80% of the heat energy loss data is explained by the model; however, the linear model has the least and worst predictive power, with only 4% of the data being fitted.

$$Q = 0.052t + 353.581, \quad R^2 = 0.04 \quad (22)$$

$$Q = -2.340 \times 10^{-4}t^2 + 0.910t - 171.944, R^2 = 0.773 \quad (23)$$

$$Q = 4.886 \times 10^{-10}t^3 - 0.001t^2 + 1.305t - 292.807, R^2 = 0.801 \quad (24)$$

The partial F-test between the models also revealed that the quadratic and cubic models are significant at a significant level (P) of 0.001; however, the linear model is not significant enough to predict the observed data of the heat energy loss of the non-insulated type of gasifier stove, as shown in Table 4, below. Moreover, the ANOVA between the quadratic and cubic models is also significant, but the cubic models are relatively the best fit to predict the observation. In general, the heat energy loss of the non-insulated type of gasifier stove is greater than the heat loss of the insulated type of gasifier stove, where the gasifier is essentially insulated to reduce such energy loss.

TABLE IV.

POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF HEAT ENERGY LOSS WITHIN TIME ELAPSE FOR NON-INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R- Square
	Constant	t	t ²	t ³	
Linear	353.58** (8.875)	0.052** (0.004)	-	-	0.040 (268.721)
Quadratic	-171.944** (5.49e-14)	0.910** (9.772e-17)	-2.34e-04** (3.65e-20)		0.772 (130.54)
Cubic	-292.807*** (8.086)	1.305** (0.019)	0.001** (1x10 ⁻⁴)	4.886x10 ⁻⁸ *** (1x10 ⁻⁴)	0.801 (122.323)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1.

The graph in Fig. 15 shows the visualizations of the polynomial model fit for the energy loss in the non-insulated type gasifier stove, where the linear, quadratic, and cubic model curves are black, blue, and red lines, respectively, concerning the green line of the observed data curve of the heat energy loss of the non-insulated gasifier stoves. The heat energy loss of a non-insulated type gasifier stove is the lowest fit with the irregular shape of the heat energy loss with time elapse among the models than the parameters. The maximum energy loss was 933.549J after 1468 seconds of gasification operation, whereas after 3400 seconds, the heat energy loss gradually declined concerning the residual temperature of the stove until the equilibrium condition of the room temperature was reached during the evaluation of the stove, as shown in the graph in figure 15.


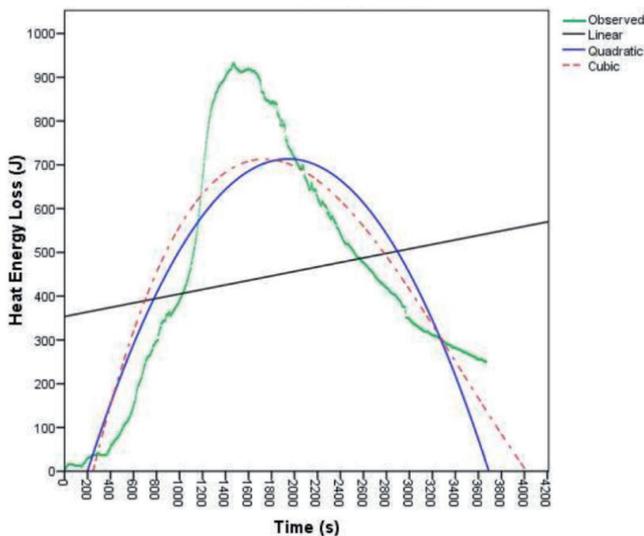



Fig. 15. Visualizations of the polynomial model fit for the energy loss in the non-insulated type gasifier stove

The study used a cubic polynomial model to analyze the heat energy generated and the burning time curve of a non-insulated type gasifier stove. The 95% confidence interval (CI) was aligned with the heat energy generated and burning time curve, providing a range of likely values for the mean response or heat energy loss given the specified settings of predictors or burning time. The confidence interval indicates confidence about the mean of future values, while the 95% prediction interval (PI) is a range likely to contain a single future response for a selected determination of variable settings of heat energy loss and burning time (Fig. 16a). The normal probability plot of residuals is illustrated in Fig. 16b, showing the residuals versus their expected values when the distribution is normal. The residuals versus fits graph, in Fig. 16c, plots


the residuals on the y-axis and the fitted values on the x-axis, verifying the assumption that the residuals are randomly distributed and have constant variance. The histogram of the residuals, in Fig. 16d, shows the distribution of the residuals for all observations, which is most effective when there are approximately 20 or more data points without skewness or outliers. Fig. 16e is the residuals versus order plot displaying the residuals in the order that the data were collected, verifying the assumption that the residuals are independent of one another. The independent residuals showed no trends or patterns when displayed in time order, falling randomly around the center line.

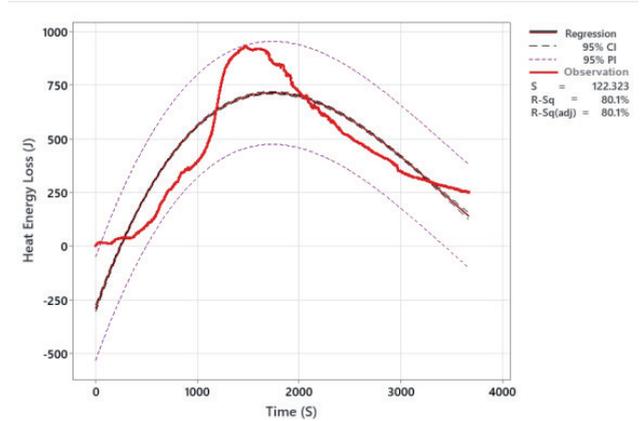


a)

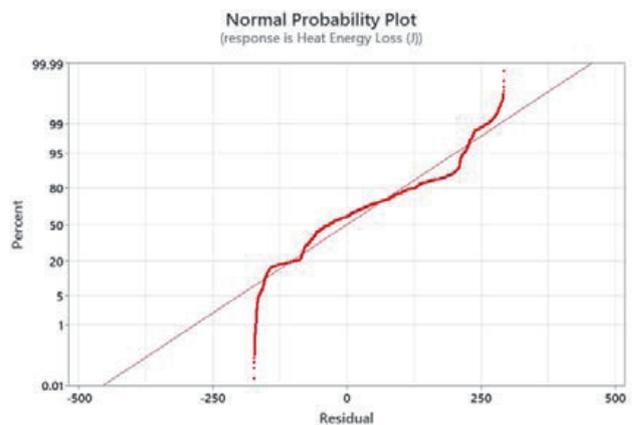


b)

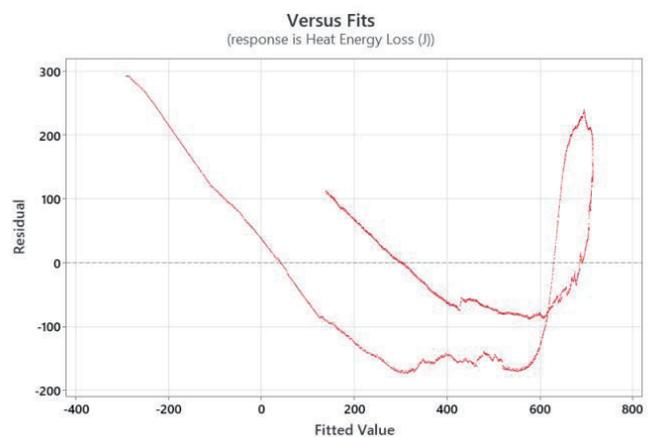

c)

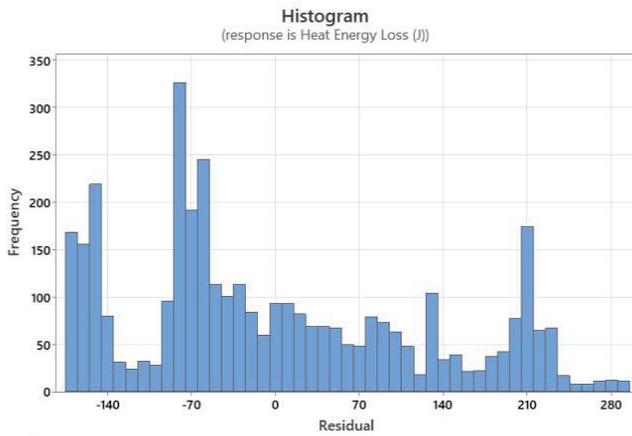

d)

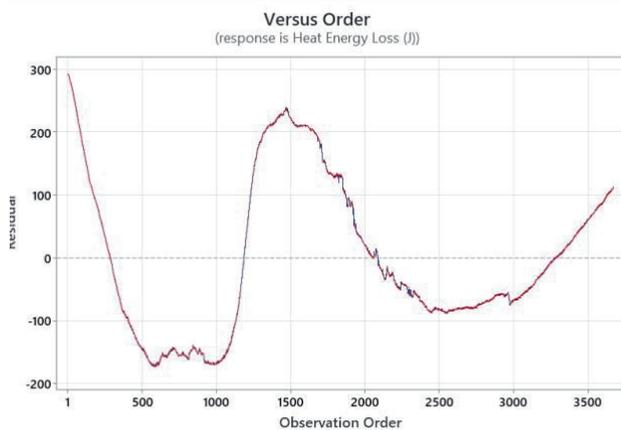

e)

Fig. 16. The Polynomial Regression Analysis: The Heat Energy Loss by non-insulated Type Gasifier Stove of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e) of the non-insulated Type Gasifier Stove.

E.3. ANALYSIS OF WATER BOILING TEMPERATURE

The water boiling temperature per operating time was the other parameter to determine how fast and at what temperature to boil two liters of water through insulated and non-insulated gasifier stoves. The analysis of multiple regression models for both gasifier stoves was made to determine the boiling temperatures of the water concerning operating time. The residual standard errors (RSE), the coefficient of determination (R^2), and the partial F-test are used to test or determine whether a variable can be removed or added from a model without making a model significantly better or worse to analyze the three polynomial regression models.

E.3.3.1. WATER BOILING TEMPERATURE OF THE INSULATED TYPE GASIFIER STOVE

The relationship between water boiling temperature and operating time of an insulated type gasifier stove has been analyzed using a polynomial regression model using all linear, quadratic, and cubic models. The model fits of linear, quadratic, and cubic models have been illustrated in Eqs. 25, 26, and 27, respectively. The residual standard errors of linear, quadratic, and cubic models are 22.615, 6.851, and 2.625, respectively. The smallest standard error (RSE) of 2.625 for a cubic polynomial model showed that the best measures and closest to the observed values among the predicted models, which summarizes a well-fitting model. The cubic

model showed the lowest RSE, indicating an idea of how far the observed boil temperature is from the predicted model value.

$$T_w = 0.003t + 87.709, R^2 = 0.02 \quad (25)$$

$$T_w = -2.791 \times 10^{-5} t^2 + 0.093t + 39.487, R^2 = 0.91 \quad (26)$$

$$T_w = 1.004 \times 10^{-8} t^3 - 7.642 \times 10^{-5} t^2 + 0.156t + 2.718, R^2 = 0.987 \quad (27)$$

The polynomial regression models also determine whether the model fits the observed water temperature data of the insulated gasifier stove using the coefficient of determination (R^2). The R^2 values of the linear, quadratic, and cubic models are 0.02, 0.91, and 0.987, respectively, revealing that the cubic model has the highest value with 98.7% of the variation of water boiling temperature observed by the model, whereas the lowest R^2 value is the linear model with only 2% of the observed data, as shown in Table 5. The ANOVA, or partial F-test, between the three models, was made for model building and variable selection to decide whether to remove a variable from a model without making it significantly worse or add a variable to the model to make it significantly better. The ANOVA between models shows a significant difference at a probability level (P) > 0.001. It also revealed that the ANOVA between cubic and quadratics with observed data of water boiling temperature is not significant at $P > 0.001$, but the linear model with the observed data has a significant difference. Hence, the cubic model is the best-fit model to predict the observed data of water boiling temperature. The quadratics are linear based on the RSE and R^2 determination methods, but the partial F-test indicated that both the cubic and quadratic models are the best fit.

TABLE V.

POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF BOILING TEMPERATURE OF WATER WITHIN TIME ELAPSE FOR INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R- Square
	Constant	t	t ²	t ³	
Linear	87.709*** (0.798)	0.003*** (3.67e-04)	-	-	0.02 (22.615)
Quadratic	39.49*** (1.0e-14)	0.093*** (1.78e-17)	-2.791x10 ⁻⁵ *** (6.65e-21)		0.91 (6.851)
Cubic	-22.718*** (1.55e-14)	0.156*** (5.178e-17)	-7.642 x10 ⁻⁵ *** (4.639e-20)	1.004x10 ⁻⁸ *** (1.176e-23)	0.987 (2.625)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1.

The graph in Fig. 17 showed that the visualizations of the polynomial model fit the boiling temperature of water in the insulated gasifier stove. As shown in Fig. 17, the maximum water boiling temperature of the insulated type gasifier stove was recorded at 124.9 °C after 1453 seconds of water boiling operation. The boiling operation was continued until 3400 seconds, even after finishing the rice husk fuel. The graph in Fig. 17, shows the cubic model (red line) is the best fit up to 3400 seconds of operation, but after the end of the observed water boiling temperature, the line of the cubic model rises in shape, so that the model fit of the cubic model is the best fit until the 3400 seconds of operation, hence the quadratic model or the blue line may be preferred. The average operation time in one batch feed of husk for insulated types of gasifier stoves was 2033.28 seconds. After this operation time, the recorded temperature was the residual temperature of the water graph of the observed boiling temperature (the green line), which continuously declined until the equilibrium condition reached room temperature.


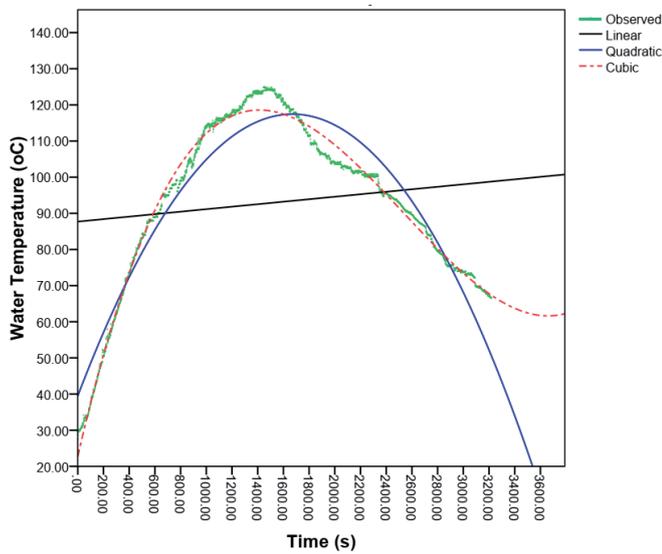



Fig. 17. Visualizations of the polynomial model fit for the water boiling temperature in the insulated type gasifier stove

As shown in Fig 18a, the study focuses on the water boiling temperature of an insulated type gasifier stove at a 95% confidence interval (CI) for fit, which provides a range of likely values for the mean response of water temperature given the specified settings of predictors of boiling time. The 95% confidence interval (PI) assesses the estimate of the fitted value for the observed values of the variables (boiling temperature and boiling time) with a 95% confidence level, ensuring that the confidence interval contains the population means for the specified values in the model. The 95% prediction interval (PI) is a range that is likely to contain a single future response for a selected determination of variable settings (boiling temperature and boiling time). The PI extends inside the acceptable boundaries, indicating that the predictions were sufficiently precise for 95% PI requirements. The prediction interval is always wider than the confidence interval due to the added uncertainty involved in predicting a single response versus the mean response (Fig 18a). The normal probability plot of the residuals as shown in Fig 18b, displays the residuals versus their expected values when the distribution is normal, verifying the assumption that the residuals are normally distributed. The graph in Fig. 18c, the residuals versus fits graph plots the residuals on the y-axis and the fitted values on the x-axis, verifying the assumption that the residuals are randomly distributed and have constant variance. The Fig. 18d, the histogram of the residuals is most effective when there are approximately 20 or more data points, ensuring that each bar on the histogram contains enough data points to reliably not show

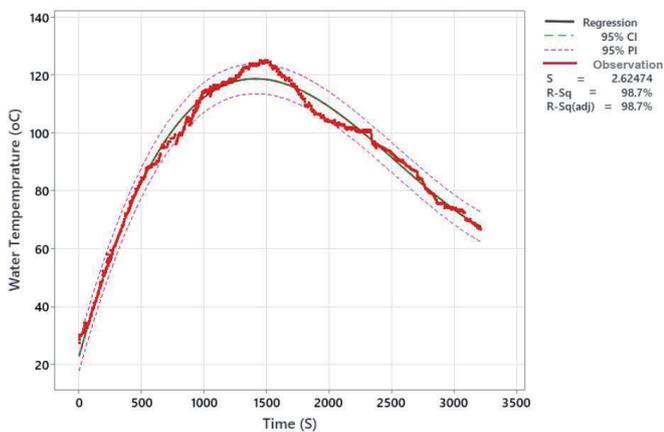


skewness or outliers.


a)

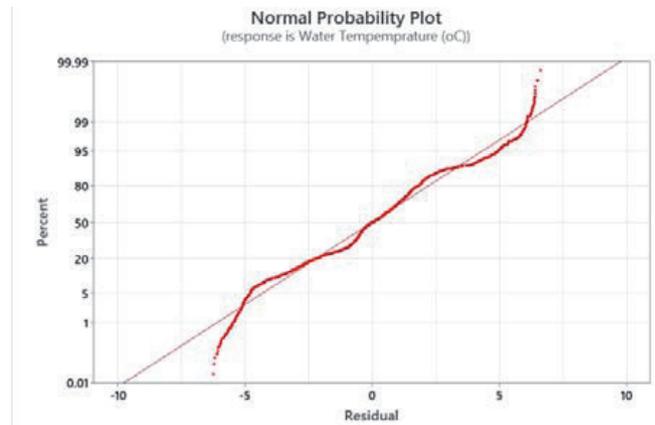


b)

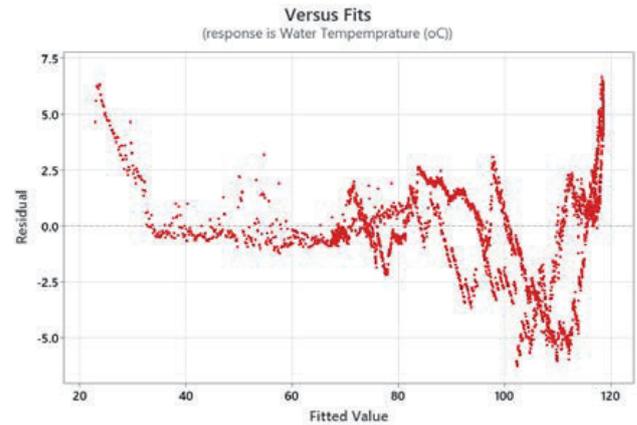

c)

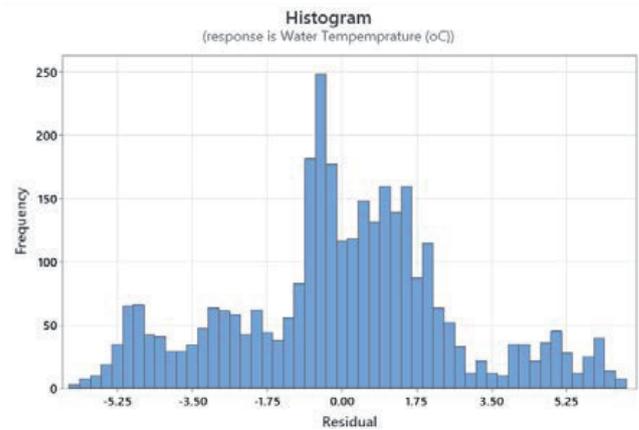

d)

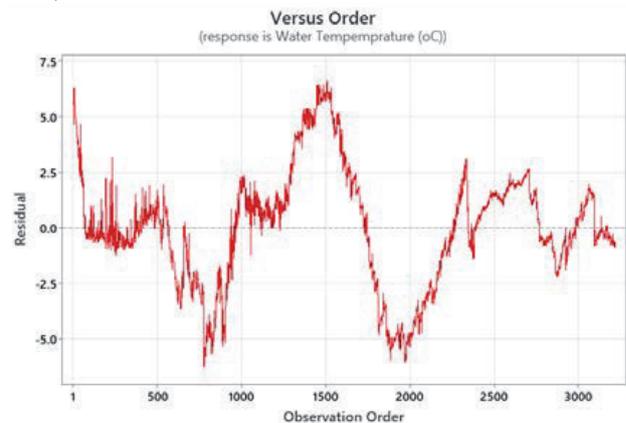

e)

Fig. 18. The Polynomial Regression Analysis: The Water Boiling Temperature of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e) of the insulated Type Gasifier Stove.

3.6.3.2. WATER BOILING TEMPERATURE OF THE NON-INSULATED TYPE GASIFIER STOVE

The water boiling temperature of the non-insulated type of gasifier stove with the boiling or operating time was analyzed using multiple regression models. The polynomial regression model included the linear, quadratic, and cubic models presented in Eqs. 28, 29, and 30, respectively. The residual standard errors (RSE) of the linear, quadratic, and cubic models are 36.60, 20.60, and 12.383, respectively. The cubic polynomial model has the lowest value with 12.383, showing the closest among the models to predict the observed data of a non-insulated type gasifier stove of the water boiling temperature, and can be thought of as summarizing how well the cubic model fits.

$$T_w = 2.7 \times 10^{-4} t + 178.24, \quad R^2 = 3.6 \times 10^{-6} \quad (28)$$

$$T_w = -4.509 \times 10^{-5} t^2 + 0.136 t + 110.535, \quad R^2 = 0.683 \quad (29)$$

$$T_w = 3.225 \times 10^{-8} t^3 - 1.902 \times 10^{-4} t^2 + 0.31 t + 6.911, \quad R^2 = 0.886 \quad (30)$$

On the other hand, the coefficients of determination (R^2) of the linear, quadratic, and cubic models are 0.886, 0.683, and 3.6×10^{-6} , respectively, as shown in Table 6 below. The cubic model is significantly higher, with 88.6% of the observed water boiling temperature of the non-insulated gasifier stove perfectly explained by the cubic predicted model fit. The percentage of prediction of the observed data in quadratics and linear models is 68.3% and 0.00036%, respectively, showing that the expression power of the linear model is almost null or worse and should be ignored, whereas the quadratic model is relatively better than the linear model but lower than the cubic model, as shown in Table 6.

TABLE 6.

POLYNOMIAL REGRESSION SUMMARY USING LINEAR, QUADRATICS AND CUBIC MODEL (STANDARD ERROR IS IN PARENTHESIS) OF BOILING TEMPERATURE OF WATER WITHIN TIME ELAPSE FOR NON-INSULATED TYPE GASIFIER STOVE

Model	Coefficients				R- Square
	Constant	t	t ²	t ³	
Linear	178.237*** (1.337)	2.70×10^{-4} (7.72×10^{-4})	-	-	3.6×10^{-6} (36.601)
Quadratic	110.535*** (1.13)	0.136*** (0.002)	-4.509×10^{-5} *** (10^{-5})		0.683 (20.599)
Cubic	66.911*** (0.905)	0.31*** (0.003)	-1.905×10^{-4} *** (10^{-4})	3.225×10^{-8} (10^{-4})	0.886 (12.383)

Significance codes: 0.0001***, 0.001**, 0.01*, 0.05, 0.1.

The graph in Fig. 19 shows the visualizations of the polynomial model fit for the water boiling temperature in the non-insulated type gasifier stove, where the maximum boiling temperature was recorded at 208.8 °C after 662 seconds of operation during the water-boiling test of the non-insulated type gasifier stove. As shown in the graph in Fig. 19, the observed data (green line in the graph) of water boiling temperature showed sharp increases within a 0-550 second period, then water boiling temperature was constant (in the curve, a straight line in the graph) for 1300 seconds (551 to 1850 seconds in the graph), where the average temperature was 205.83 °C. However, at the end of 1850 seconds in the straight-line curve on the graph, the temperature gradually declines to equilibrium with a room. The red, blue, and black with green line colors on the graph were cubic, quadratic, and linear models that fit with the observed data on the boiling temperature of water in the non-insulated types of gasifier stoves, respectively.


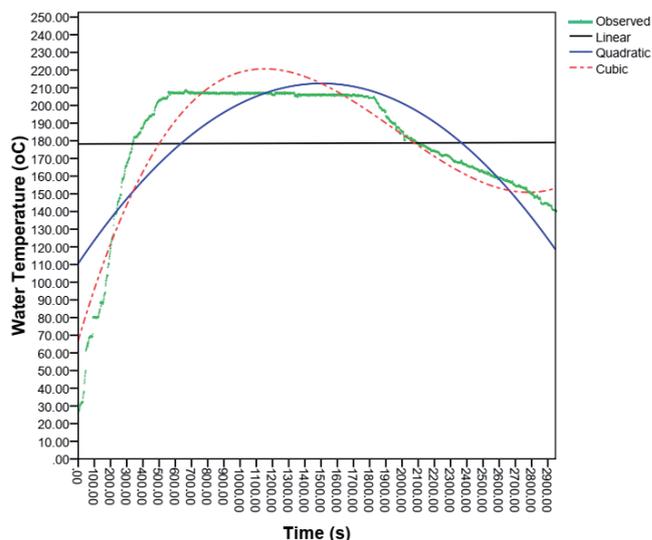


Fig. 19. Visualizations of the polynomial model fit for the water boiling temperature in the non-insulated type gasifier stove

The insulated type gasifier stove's water boiling temperature is predicted using a 95% confidence interval (CI), which evaluates the fitted value estimate for observed values of variables. As shown in Fig. 19a, this means that there is a 95% chance that the population means for the specified values are contained in the confidence interval. The principal investigator evaluated the predicted accuracy and results' applicability, finding that a single response was contained within the interval given the predictor settings or boiling time (Fig. 20a). The residuals are shown in Fig 20b against their anticipated values in a normal probability plot, confirming the premise that the residuals are normally distributed (Fig 20b). Fig 20c is the residuals versus fits graph depicting the residuals on the y-axis and the fitted values on the x-axis, confirming the assumption that the residuals are randomly distributed and have constant variance. On the other hand, Fig 20d is the residual histogram that displays the residual distribution for each observation for which the data was found to be roughly normal and satisfying the requirements of the cubic polynomial model. The best results from a histogram are obtained with at least 20 data points, as each bar on the histogram has enough data points to consistently not display skewness or outliers due to the large sample size (Fig. 20d). As shown in Fig 20e, the residuals versus order plot illustrates the residuals in the order in which the data were collected, showing that independent residuals do not exhibit any trends or patterns when presented in time order.

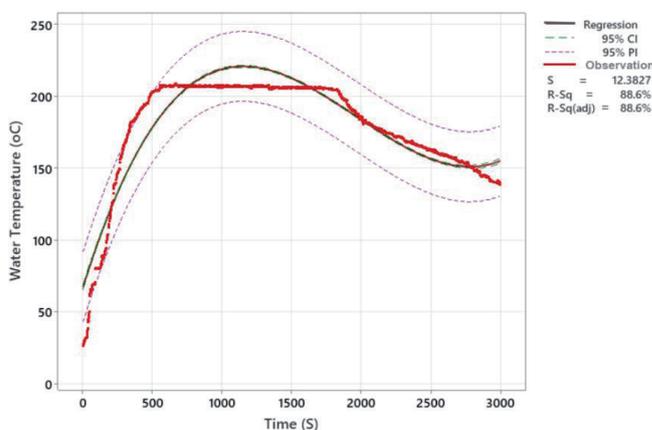

a)

IV. CONCLUSION AND RECOMMENDATION

This study aims to evaluate and model the performance of rice husk gasifier cook stoves for household energy use, a byproduct of rice milling. The study compares insulated and non-insulated gasifier stoves using rice husks, focusing on environmental issues and promoting the use of rice husks as a renewable energy source and pest repellent in stoves. The study found that the insulated stove had a lower start-up time but no significant difference at a 5% probability level. The temperature change was not significant, as heat transfer and temperature change started when the husk was ignited. The burner stoves had varying sizes and weights, with the maximum flame temperature at room temperature being 1,190.30°C, and the average temperature at 758.916°C for non-insulated gasifier stoves. Insulated gasifier stoves had maximum and average temperatures of 518.30°C and 289.014°C at room temperature. The operating time of stoves directly influences the fuel consumption rate, specific gasification rate, and combustion zone rate of stoves. The fuel consumption rate has a significant effect on the type of gasifier stove, with the maximum rates being 3.820 and 2.099 kg/hr. The time to consume rice husks to gasify them depends on the density of the rice husk, reactor volume, and fuel consumption rate. The average specific gasification rate for insulated and non-insulated stoves is 106.45 and 120.63 kg/m³h, respectively. The performance of gasifier stoves varies based on the biochar conversion rate, with non-insulated stoves producing a higher biochar mass per rice husk. Multiple regression analysis was used to model the relationship between time elapse and temperature/heat energy, with the cubic polynomial model being the best predictive model fit for all variables.

Ethiopia's rural communities rely heavily on biomass fuels, with wood fuel and cow dung being the largest sources. Only 15% of Ethiopia's land is covered by forests, producing most biomass energy resources. Rice husk gasification could promote renewable energy and reduce greenhouse gas emissions. Biomass briquettes from rice husk can contribute to the energy mix and waste management options for these communities, ensuring sustainability in energy exploitation (WB, 2020). Biomass gasification is a promising technology for developing countries like Ethiopia, offering easy construction, installation, and operation. Hence, rice husk gasification can be a solution for this renewable energy promotion scheme as well as an alternative for the reduction of greenhouse gas emissions, by being an alternative to the fast-declining wood fuels, which are useful in carbon sequestration and reduction of greenhouse gas emission. Energy remains essential for development, but the exploitation of energy sources needs to be carried out with sustainability in mind. The household energy derived from rice husk can have a remarkable contribution to the energy mix and waste management options of the milling wastes so with communities in rice processing areas that largely depend on wood fuel. The study highlights the importance of maintaining local biomass supply to reduce reliance on fossil fuels and the potential benefits of distributed biomass gasifier stove technologies.

Based on the study, the following recommendations can be made:

1. To ensure the continuous and sustainable functioning of this technology using local resources, it is recommended to modify the stove for continuous feed type.
2. Conduct and highlight the need for further kitchen performance evaluations to determine fuel efficiency in typical conditions.
3. Testing revealed a thermal efficiency of approximately 31.27% for the biomass gasifier stove, indicating a need for increased efficiency through an insulation system to benefit the environment and public health compared to

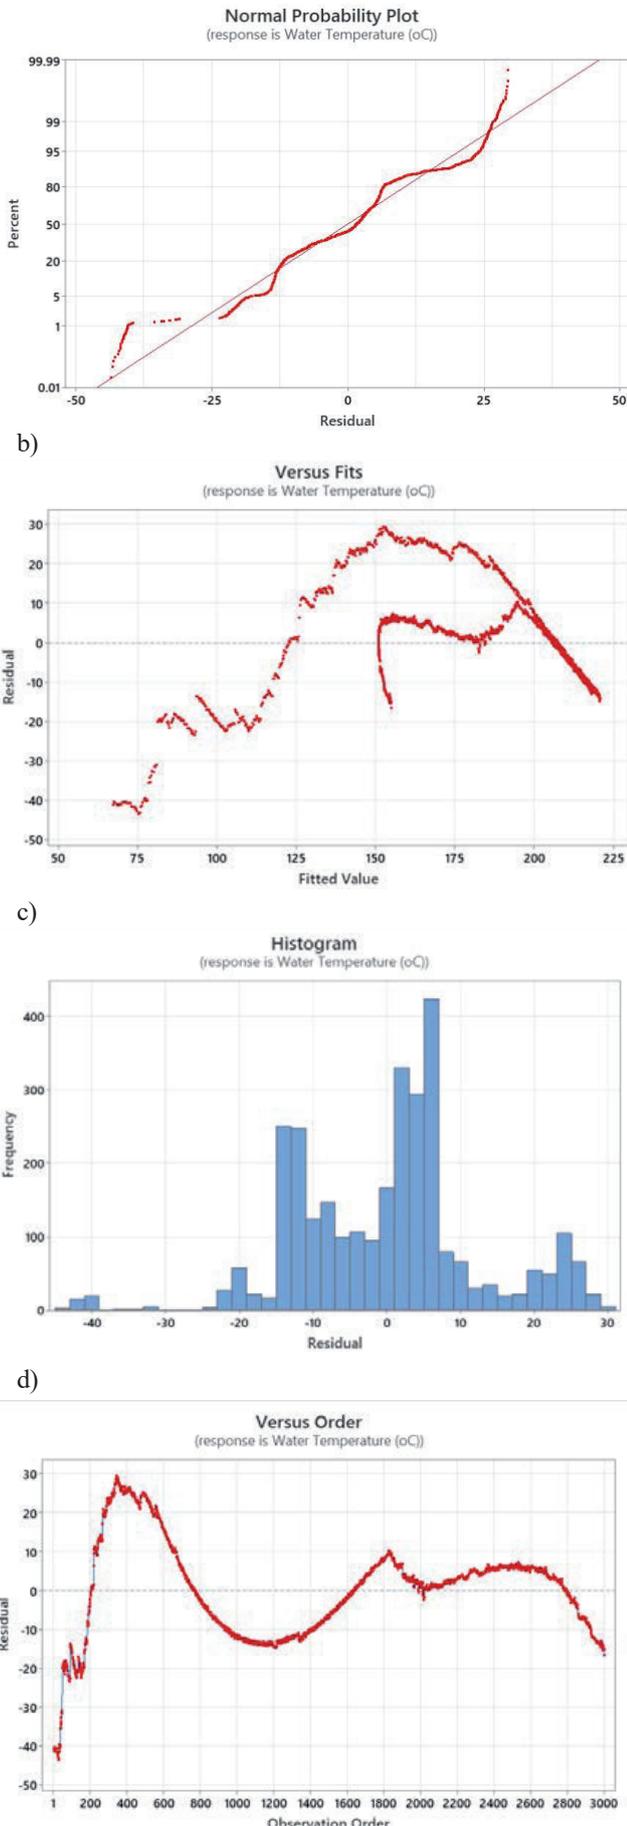


Fig. 20. The Polynomial Regression Analysis: The Water Boiling Temperature of the cubic regression model fit (a), Normal probability plot of residuals (b), Residuals versus fits (c), Histogram of residuals (d), and Residuals versus order (e) of the non-insulated Type Gasifier Stove.

traditional stoves.

4. Further research is suggested to develop continuous and enclosed biomass gasifier stoves for large-scale cooking, addressing future considerations in economics, technology, and the marketing system of the stove.
5. It needs to create demand by conducting a participatory demonstration of the gasifier stove at the village level. Local manufacturers need to be trained on the fabrication, maintenance, and operation of the stove so that the stove should be available to the end-users.

REFERENCES

- [1] The Federal Democratic Republic Of Ethiopia Central Statistics Service, "Large And Medium Scale Commercialfarms Sample Survey 2021/22(2014 EC) Results At Country And Regional Level," Addis Ababa, Ethiopia, 2022.
- [2] A. Gautam, R. Batra, and N. Singh, "A Study On Use Of Rice Husk Ash In Concrete," *Eng. Herit. J.*, vol. 3, no. 1, pp. 1–4, 2019, [Online]. Available: <http://doi.org/10.26480/gwk.01.2019.01.04>.
- [3] A. Assaye and D. Alemu, "Enhancing production of quality rice in Ethiopia : Dis/incentives for rice processors," Addis Ababa, Ethiopia, 2020.
- [4] P. R. Fernando, U. Karthika, K. Parthipan, T. Shandarabavan, R. Ismail, and A. Jeeva, "Designing a Cooker to Utilise the Natural Waste Rice Husk as a Cooking Gas," *Adv. Recycl. Waste Manag.*, vol. 2, no. 1, pp. 2–5, 2017, doi: 10.4172/2475-7675.1000117.
- [5] N. E. Benti et al., "The current status, challenges and prospects of using biomass energy in Ethiopia," *Biotechnol. Biofuels*, vol. 14, no. 209, pp. 1–24, 2021, doi: 10.1186/s13068-021-02060-3.
- [6] B. Tamrat, B. Yilma, and M. Asfaw, "Design and Optimization of Continuous Type Rice Husk Gas Stove," *ICST Inst. Comput. Sci. Soc. Informatics Telecommun. Eng.*, pp. 623–633, 2020, doi: 10.1007/978-3-030-43690-2.
- [7] A. S. Yusuf, A. M. Ramalan, I. O. Adebayo, F. A. Makanjuola, N. F. Akpan, and K. U. Isah, "Development of Rice Husk and Saw Dust Briquettes for Use as Fuel," *Am. Based Res. J.*, vol. 10, no. 01, 2021, [Online]. Available: <https://www.researchgate.net/publication/348975115%0ADevelopment>.
- [8] A. T. Belonio, *Rice Husk Gas Stove Handbook*. Appropriate Technology Center. Iloilo City, Philippines.: Department of Agricultural Engineering and Environmental Management, College of Agriculture, Central Philippine University, 2005.
- [9] R. A. Fajri and N. Hamdi, "Optimization of Making Charcoal Briquettes from Rice Husks with Variations in the Composition of Adhesive Materials and Compaction Pressure," *Formosa J. Appl. Sci.*, vol. 2, no. 10, pp. 2265–2276, 2023.
- [10] K. P. Shrestha, P. Parajuli, B. Baral, and B. P. Shrestha, "Mathematical modeling , simulation and analysis of rice grain movement for design and fabrication of low-cost winnowing machine," vol. 9, no. January, pp. 1–14, 2017, doi: 10.5897/JMER2016.0403.
- [11] D. G. Mercer, "Design, Construction And Evaluation Of Performance Of Solar Dryer For Drying Fruit" September, 2015. Available: clearning.iufost.org/sites/default/files/Intermediate-Outline-1.pdf.
- [12] A. K. Gomez and A. A. Gomez, *Statistical Procedures for Agricultural Research*, 2nd 105 ed. John Wiley and Sons, New York, p. 97-107., 1984.
- [13] S. A. Ndindeng, M. Wopereis, S. Sanyang, and K. Futakuchi, "Evaluation of fan-assisted rice husk fuelled gasifier cookstoves for application in sub-Saharan Africa," *Renew. Energy*, vol. 139, pp. 924–935, 2019, doi: 10.1016/j.renene.2019.02.132. Available: <https://doi.org/10.1016/j.renene.2019.02.132>
- [14] P. Bhusal, B. B. Ale, and R. M. Singh, "Performance Evaluation of Domestic Rice Husk Gasifier Stove (Belonio Type) and Study on Modification of Design for using Different Biomass," in *Proceedings of IOE Graduate Conference*, 2015, 2015, pp. 55–62.